


Drawer and Cabinet Specifications

Drawer box specification

Front view

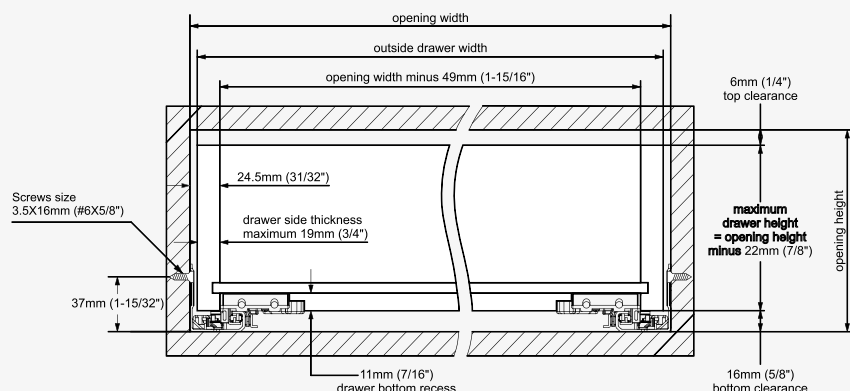

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	19mm (3/4")	18mm (11/16")	17mm (11/16")	16mm (5/8")	15mm (9/16")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (9/16")	17mm (11/16")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.


Drawer back preparation

Rear view




TCH - 23000 R.P.01 Rear mounting

Front view




TCH - 23000 R.S.01 Rear mounting

Front view



Note: Use a minimum of three screws per bracket

Runner mounting specifications

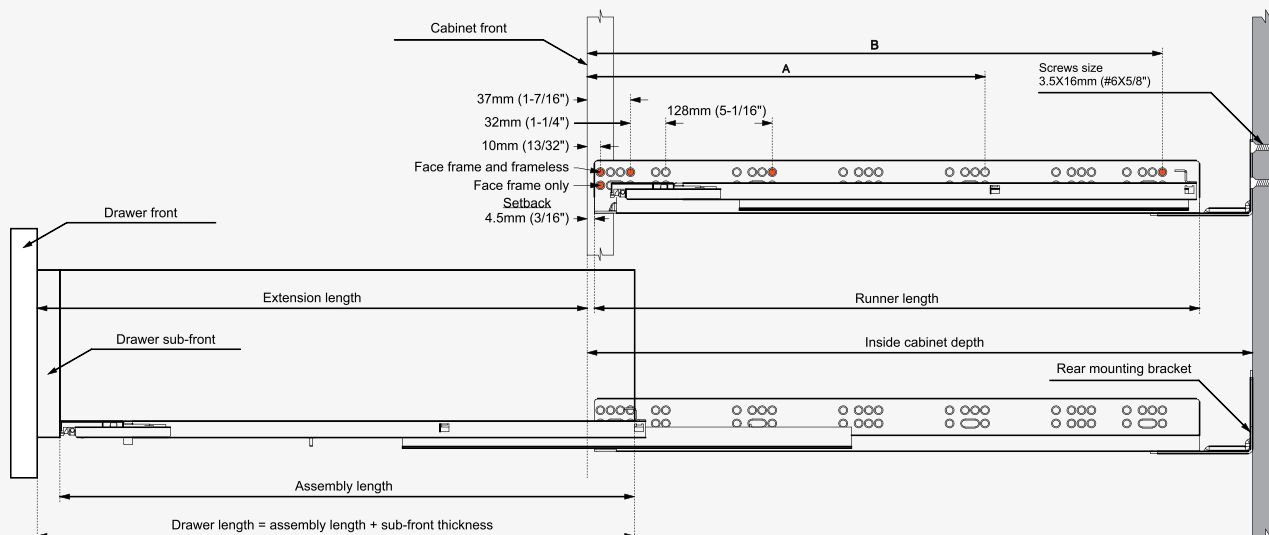

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length +/- 3mm	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23102 19.305.3D	305mm (12")	326mm (12 13/16")	289mm (11 3/8")	277mm (10 7/8")	-	261mm (10 1/4")	343mm (13 1/2")	368mm (14 1/2")
TCH-23102 19.381.3D	381mm (15")	402mm (15 13/16")	365mm (14 3/8")	353mm (13 7/8")	261mm (10 1/4")	357mm (14 1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23102 19.457.3D	457mm (18")	478mm (18 13/16")	441mm (17 3/8")	429mm (16 7/8")	357mm (14 1/16")	453mm (17 13/16")	495mm (19 1/2")	521mm (20 1/2")
TCH-23102 19.533.3D	533mm (21")	554mm (21 13/16")	517mm (20 3/8")	505mm (19 7/8")	357mm (14 1/16")	517mm (20 3/8")	571mm (22 1/2")	597mm (23 1/2")