


Drawer and Cabinet Specifications

Drawer box specification

Front view

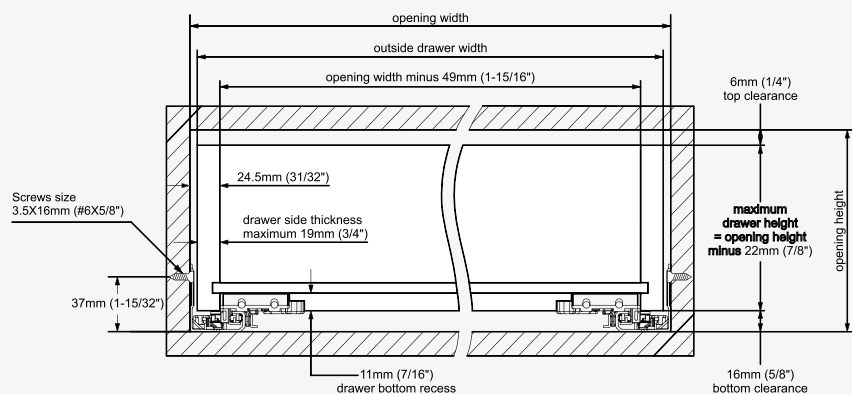

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	19mm (3/4")	18mm (11/16")	17mm (11/16")	16mm (5/8")	15mm (9/16")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (9/16")	17mm (11/16")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Drawer back preparation

Rear view



Runner mounting specifications



Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length +/- 3mm	Screw locations for frameless cabinet		Minimum inside cabinet depth
					A	B	
TCH-23105 19.381.3D	381mm (15")	391mm (15 3/8")	365mm (14 3/8")	353mm (13 7/8")	261mm (10 1/4")	357mm (14 1/16")	406mm (16")
TCH-23105 19.457.3D	457mm (18")	467mm (18 3/8")	441mm (17 3/8")	429mm (16 7/8")	357mm (14 1/16")	421mm (16 9/16")	482mm (19")
TCH-23105 19.533.3D	533mm (21")	543mm (21 3/8")	517mm (20 3/8")	505mm (19 7/8")	357mm (14 1/16")	517mm (20 3/8")	558mm (22")
TCH-23105 19.610.3D	610mm (24")	620mm (24 7/16")	594mm (23 3/8")	582mm (22 15/16")	357mm (14 1/16")	549mm (21 5/8")	635mm (25")