


Drawer and Cabinet Specifications



Drawer box specification

Rear view

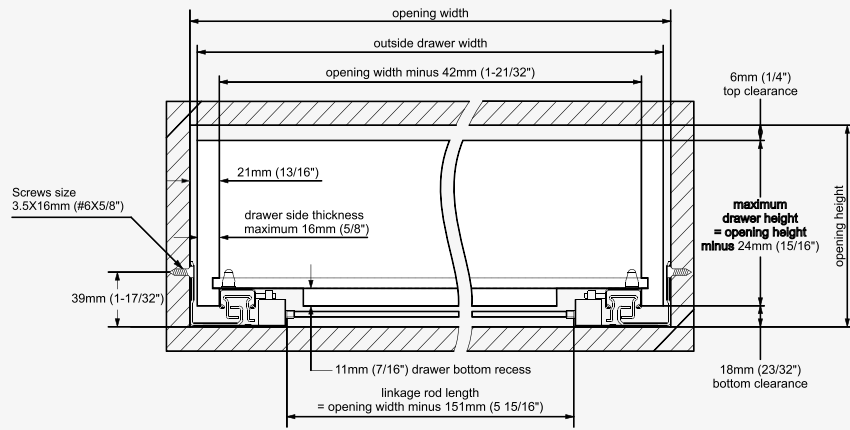

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	16mm (5/8")	15mm (9/16")	14mm (9/16")	13mm (1/2")	12mm (1/2")
Deduct from inside cabinet width	10mm (3/8")	12mm (1/2")	14mm (9/16")	16mm (5/8")	18mm (11/16")


Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Drawer back preparation

Rear view



Runner mounting specifications

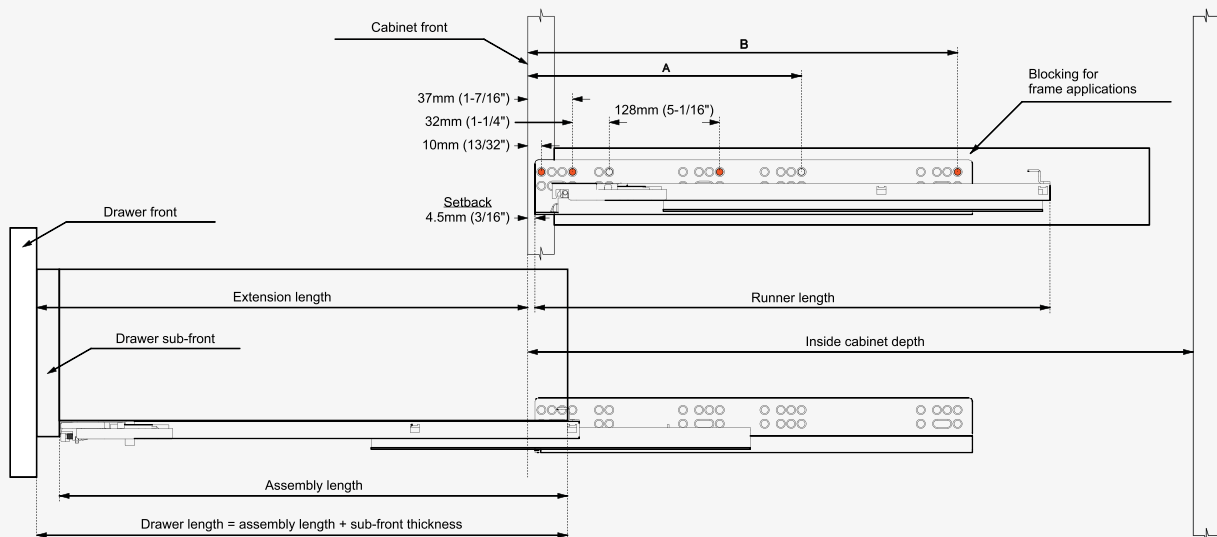

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length +/- 3mm	Screw locations for frameless cabinet		Minimum inside cabinet depth
					A	B	
TCH-23303.S 16.457.3D	457mm (18")	462mm (18 3/16")	441mm (17 3/8")	429mm (16 7/8")	-	261mm (10 1/4")	482mm (19")
TCH-23303.S 16.533.3D	533mm (21")	538mm (21 3/16")	517mm (20 3/8")	505mm (19 7/8")	261mm (10 1/4")	325mm (12 13/16")	558mm (22")
TCH-23303.S 16.610.3D	610mm (24")	615mm (24 3/16")	594mm (23 3/8")	582mm (22 15/16")	261mm (10 1/4")	357mm (14 1/16")	635mm (25")