


Drawer and Cabinet Specifications



Drawer box specification

Rear view

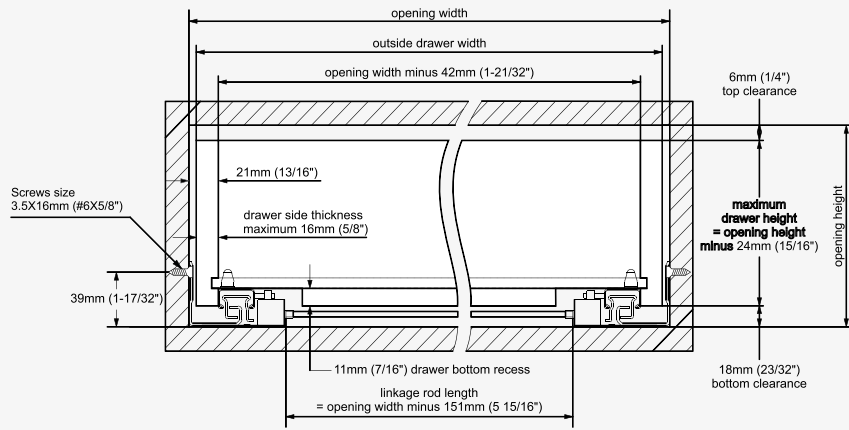

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	16mm (5/8")	15mm (9/16")	14mm (9/16")	13mm (1/2")	12mm (1/2")
Deduct from inside cabinet width	10mm (3/8")	12mm (1/2")	14mm (9/16")	16mm (5/8")	18mm (11/16")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.


Drawer back preparation

Rear view




TCH - 23000 R.P.01 Rear mounting

Front view




TCH - 23000 R.S.01 Rear mounting

Front view



Note: Use a minimum of three screws per bracket

Runner mounting specifications

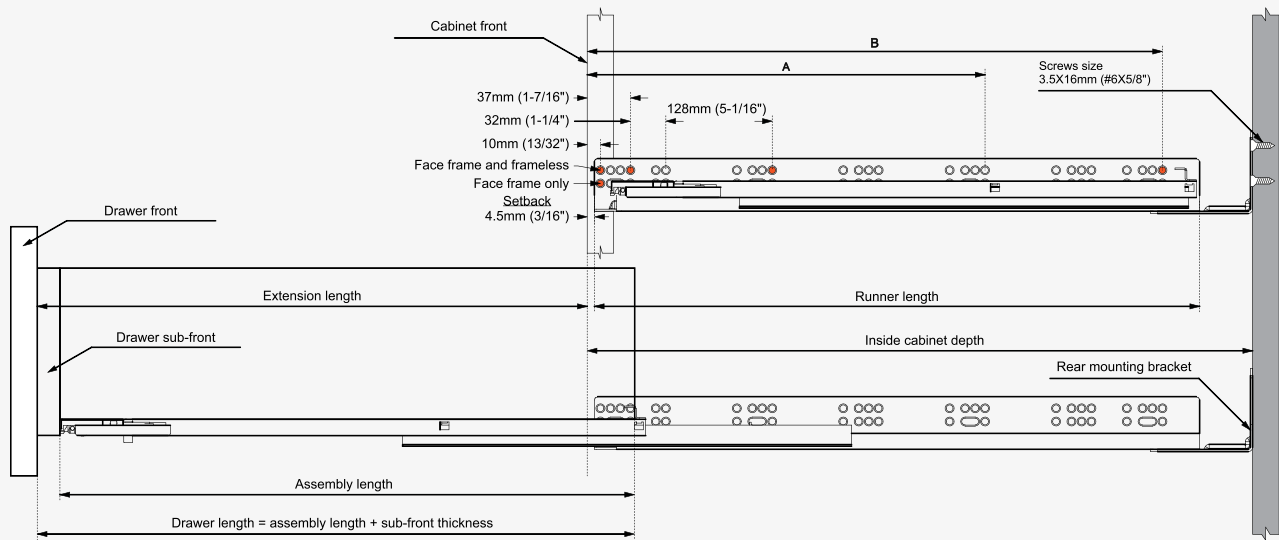

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length +/- 3mm	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23304.S 16.229.3D	229mm (9")	242mm (9 1/2")	213mm (8 3/8")	139mm (5 1/2")	-	229mm (9")	267mm (10 1/2")	292mm (11 1/2")
TCH-23304.S 16.305.3D	305mm (12")	318mm (12 1/2")	289mm (11 3/8")	256mm (10 1/16")	-	261mm (10 1/4")	343mm (13 1/2")	368mm (14 1/2")
TCH-23304.S 16.381.3D	381mm (15")	394mm (15 1/2")	365mm (14 3/8")	353mm (13 7/8")	261mm (10 1/4")	357mm (14 1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23304.S 16.457.3D	457mm (18")	470mm (18 1/2")	441mm (17 3/8")	429mm (16 7/8")	357mm (14 1/16")	453mm (17 13/16")	495mm (19 1/2")	521mm (20 1/2")
TCH-23304.S 16.533.3D	533mm (21")	546mm (21 1/2")	517mm (20 3/8")	505mm (19 7/8")	357mm (14 1/16")	517mm (20 3/8")	571mm (22 1/2")	597mm (23 1/2")
TCH-23304.S 16.610.3D	610mm (24")	623mm (24 1/2")	594mm (23 3/8")	582mm (22 15/16")	357mm (14 1/16")	581mm (22 7/8")	648mm (25 1/2")	673mm (26 1/2")