


165 DEGREES HINGE SPECIAL APPLICATIONS



STRAIGHT-ARM

THICK DOOR APPLICATION

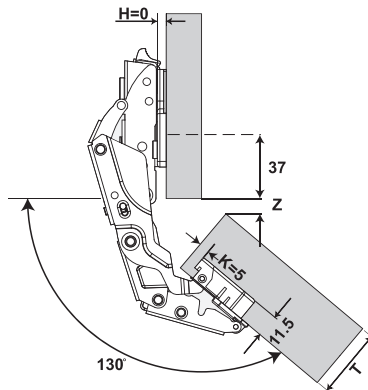


Thick door

z	16.25	13.2	10.9	8.6	6.3
T	25	29	32	35	38

Z = GAP, T = DOOR THICKNESS

THICK DOOR- TWIN APPLICATION

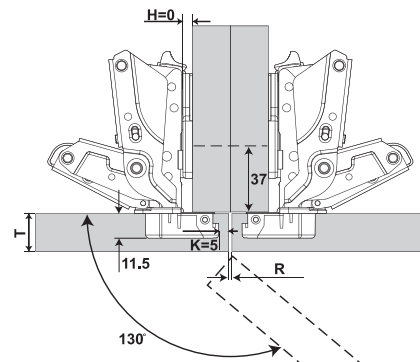


Twin Thick Door

R	0	1	2	5	13.5	28
T	16	18	20	21	25	32


R = MIN. REVEAL
T = DOOR THICKNESS

HALF-CKRANKED


LIP DOOR APPLICATION

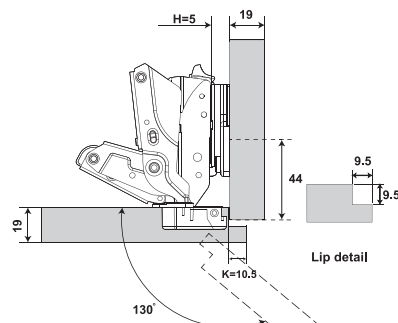

MITERED CORNER DOOR APPLICATION

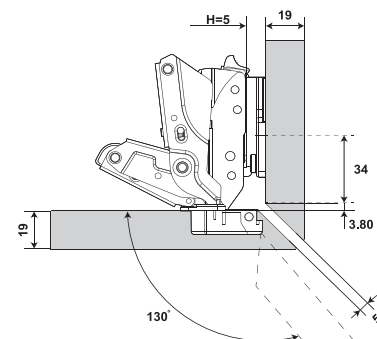

DOOR PROTRUSION

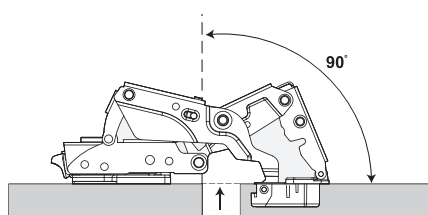

Zero protrusion for use with pull-out drawers.
With a straight-arm hinge and a 0 mm mounting plate, the door maintains 0 mm protrusion at a 90° opening, regardless of the boring distance