

ONE WAY SOFT-CLOSE STANDARD EUROPEAN HINGES

TCH-11300 SERIES




Features

- Open angle 105°
- Single-action operating type
- Soft-close built-in hydraulic damper
- Diameter of hinge cup 35mm
- Boring distance range 3mm to 7mm
- Height of hinge cup 11.5mm
- For door thickness 14mm to 21mm
- Compatible with existing mounting plates
- Finish: Nickel-plated



TCH-11307 F




Straight-arm

D	H	K	3	4	5	6	7
0			16	17	18	19	20
3			13	14	15	16	17
4			12	13	14	15	16
5			11	12	13	14	15

Abbreviations

H	mounting plate height
K	cup boring distance
D	door overlay

TCH-11307 H




Half-cranked

D	H	K	3	4	5	6	7
0			7	8	9	10	11
3			4	5	6	7	8
4			3	4	5	6	7
5			2	3	4	5	6

Abbreviations

H	mounting plate height
K	cup boring distance
D	door overlay

TCH-11307 I




Full-cranked

A	H	K	3	4	5	6	7
0			3	2	1		
3			6	5	4	3	2
4			7	6	5	4	3
5			8	7	6	5	4

Abbreviations

H	mounting plate height
K	cup boring distance
A	reveal


• Hinges per door

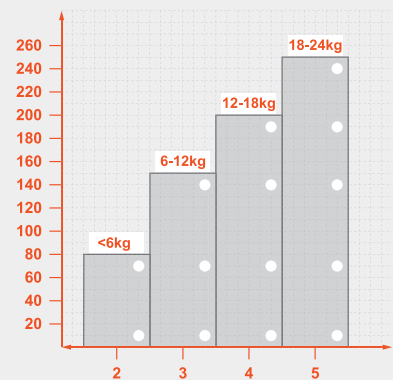


(Door width must not exceed 600 mm)

• Application

Face frame cabinet Frameless cabinet



• Cup centerpoint dimensions



• Available mounting type

