

T-X SOFT-CLOSE OVERLAY BLIND CORNER HINGE

TCH-11400 SERIES





Features

- Open angle 105°
- Controlled adjustment with gap stability
- Opening angle restrictor integrated into the hinge link
- Soft-close built-in hydraulic damper
- Diameter of hinge cup 35mm
- Boring distance range 3mm to 7mm
- Height of hinge cup 11.5mm
- For door thickness 14mm to 21mm
- Compatible with existing mounting plates
- Finish: Nickel-plated



TCH-11400 090 F

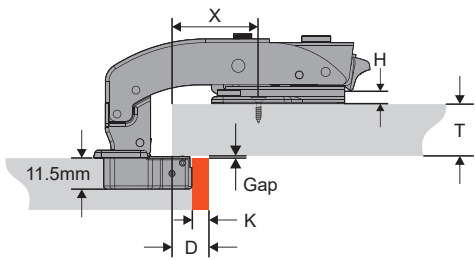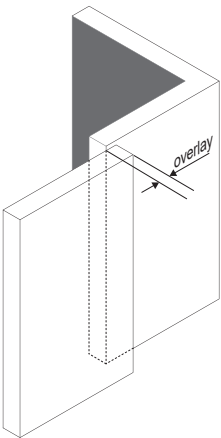

Overlay

x \ K	3	4	5	6	7
27	2	3	4	5	6
32	7	8	9	10	11
37	12	13	14	15	16


Gap

H \ T	16	19	22
0	7	4	1
3	4	1	
4	3		
5	2		

Abbreviations

H	mounting plate height
K	cup boring distance
D	door overlay
T	door thickness

Hinges per door

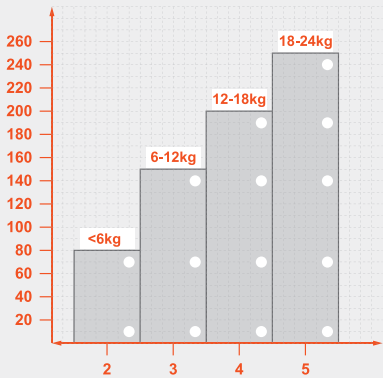


(Door width must not exceed 600 mm)


Application

Face frame cabinet

Frameless cabinet



Cup centerpoint dimensions



Available mounting type



Screw-on



Press-in