

T-X SOFT-CLOSE STANDARD EUROPEAN HINGES

TCH-11400 SERIES




Features

- Opening angle 105°
- Controlled adjustment with gap stability
- Opening angle restrictor integrated into the hinge link
- Soft-close built-in hydraulic damper
- Diameter of hinge cup 35mm
- Boring distance range 3mm to 7mm
- Height of hinge cup 11.5mm
- For door thickness up to 21mm
- Compatible with existing mounting plates
- Finish: Nickel-plated



TCH-11400 T-X F




Straight-arm

D	K	3	4	5	6	7
H	0	16	17	18	19	20
3	13	14	15	16	17	
4	12	13	14	15	16	
5	11	12	13	14	15	

Abbreviations

H	mounting plate height
K	cup boring distance
D	door overlay

TCH-11400 T-X H




Half-cranked

D	K	3	4	5	6	7
H	0	7	8	9	10	11
3	4	5	6	7	8	
4	3	4	5	6	7	
5	2	3	4	5	6	

Abbreviations

H	mounting plate height
K	cup boring distance
D	door overlay

TCH-11400 T-X I




Full-cranked

D	K	3	4	5	6	7
H	0	2.5	1.5	0.5		
3	5.5	4.5	3.5	2.5	1.5	
4	6.5	5.5	4.5	3.5	2.5	
5	7.5	6.5	5.5	4.5	3.5	

Abbreviations

H	mounting plate height
K	cup boring distance
A	reveal

Hinges per door

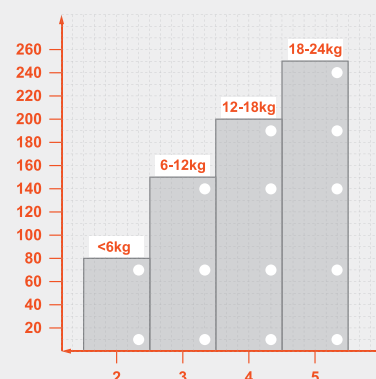


(Door width must not exceed 600 mm)

Application

Face frame cabinet Frameless cabinet



Cup centerpoint dimensions



Available mounting type

