



CATALOG

● SIDE MOUNT SLIDES



TOUCH SIDE MOUNT DRAWER SLIDES

Side mount drawer slides are a popular choice for a variety of cabinetry applications, providing a reliable and efficient method for drawer movement. These slides are installed on the sides of the drawer and the cabinet, allowing for smooth and stable extension and retraction. Typically made from durable materials like steel, side mount slides come in various lengths and weight capacities to accommodate different drawer sizes and uses.

Touch Cabinets Hardware



CONTENTS

FULL EXTENSION BALL BEARING SLIDES

TCH-22101	06
TCH-22102	08

SOFT CLOSE SIDE MOUNT SLIDES

TCH-22202	12
TCH-22204	14

PUSH TO OPEN BALL BEARING SLIDES


TCH-22304	18
-----------	----

PUSH-OPEN SOFT CLOSE SIDE MOUNT SLIDES

TCH-22402	22
TCH-22404	24

HEAVY DUTY SIDE MOUNT SLIDES

TCH-22103	28
TCH-22203	30

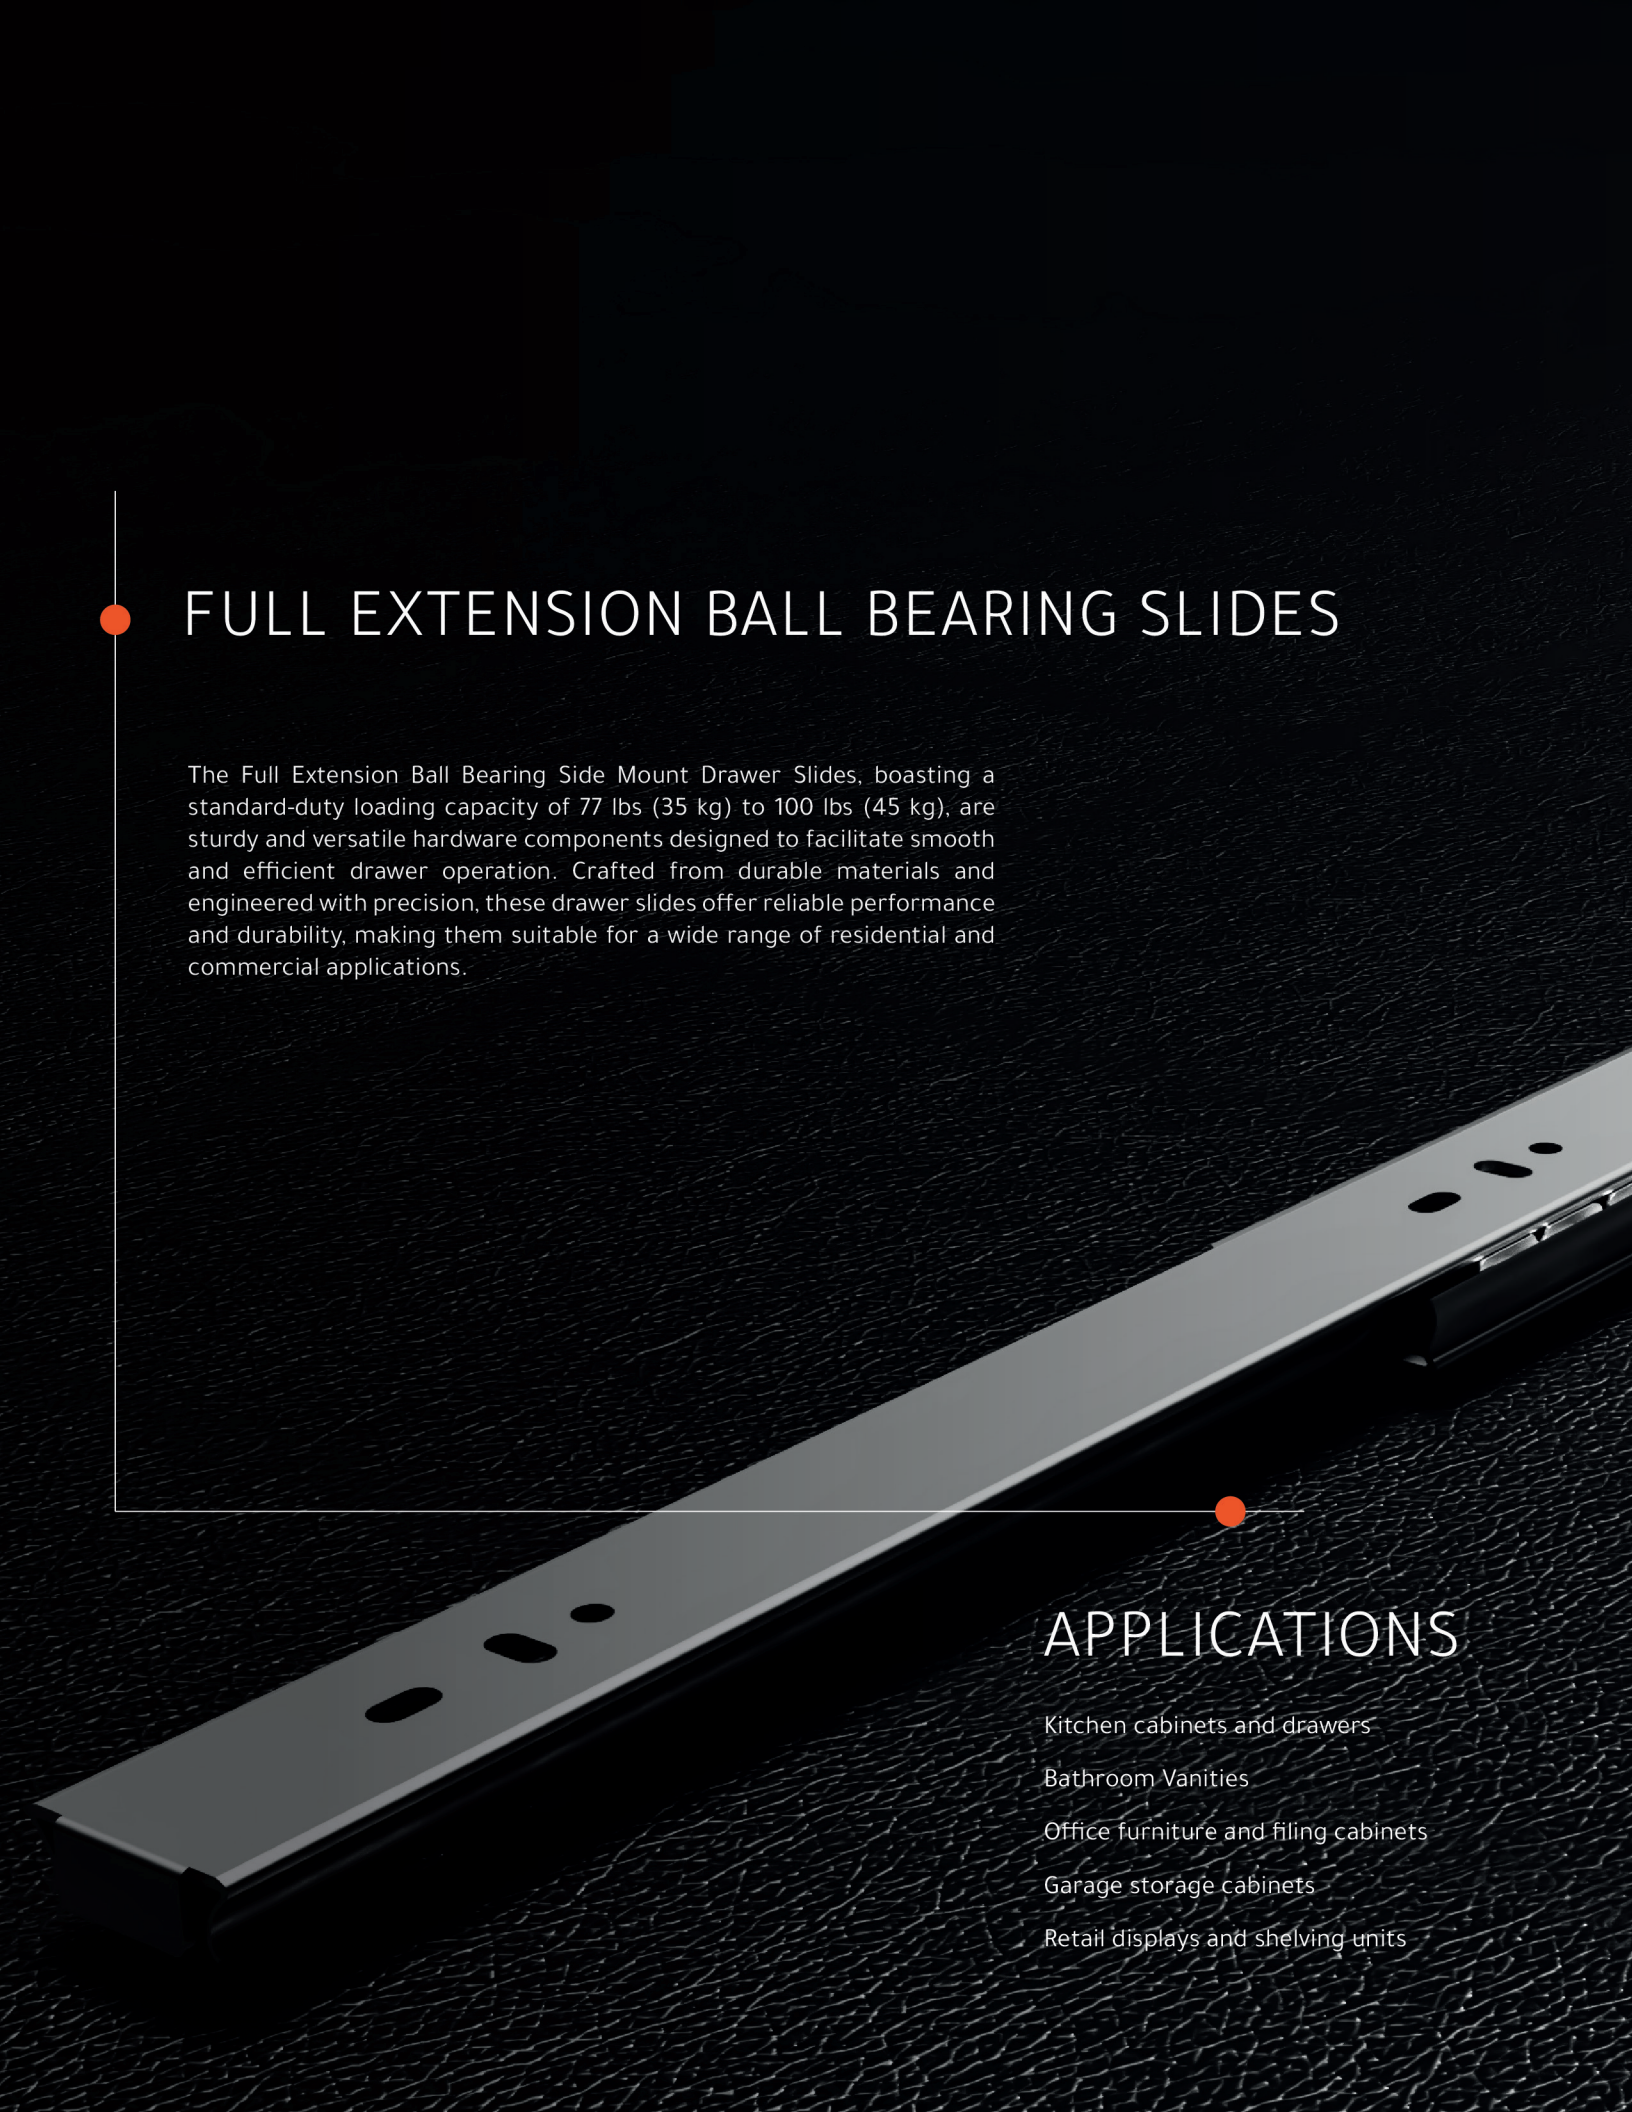

FULL EXTENSION BALL BEARING SLIDES

The Full Extension Ball Bearing Side Mount Drawer Slides, boasting a standard-duty loading capacity of 77 lbs (35 kg) to 100 lbs (45 kg), are sturdy and versatile hardware components designed to facilitate smooth and efficient drawer operation. Crafted from durable materials and engineered with precision, these drawer slides offer reliable performance and durability, making them suitable for a wide range of residential and commercial applications.

APPLICATIONS

Kitchen cabinets and drawers

Bathroom Vanities

Office furniture and filing cabinets

Garage storage cabinets

Retail displays and shelving units





Description

- Full extension
- Side mount type
- 35 kg (77 Lbs.) load capacity
- 43mm (1-11/16") Height
- 12.7mm (1/2") Side clearance
- Lever disconnect
- Finish zinc plated
- Smooth telescopic action on precision ball bearings
- Available in lengths ranging from 200mm (8") to 600mm (24")

Mounting brackets




TCH-22000 R.S.43 HL

Slide set



Runner pattern specifications

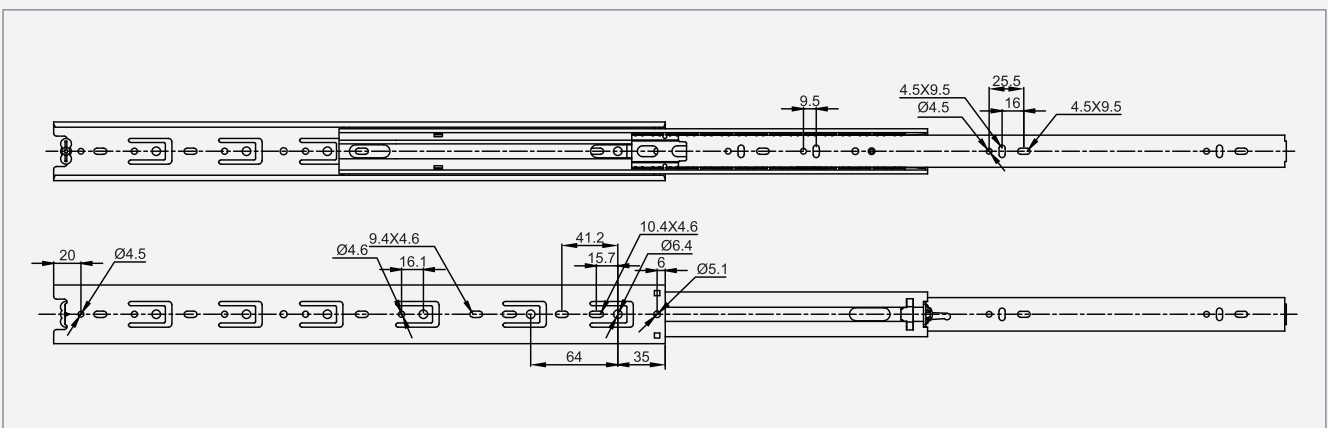


Drawer and Cabinet Specifications




Drawer box specifications

TCH-22000 R.S.43 HL Rear bracket

Front view

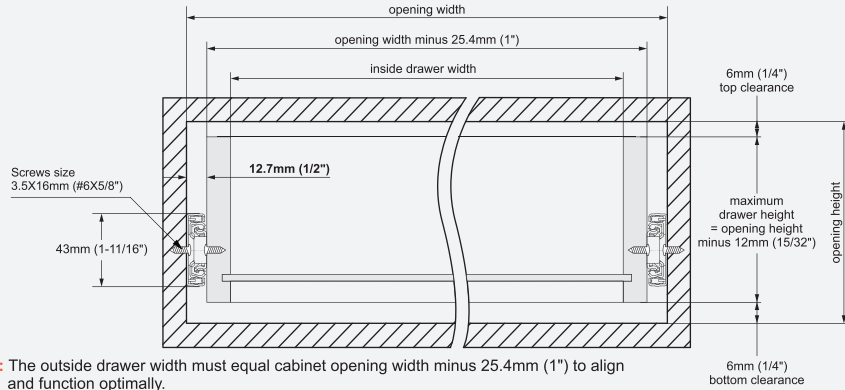


Front view



Runner mounting specifications

Side view

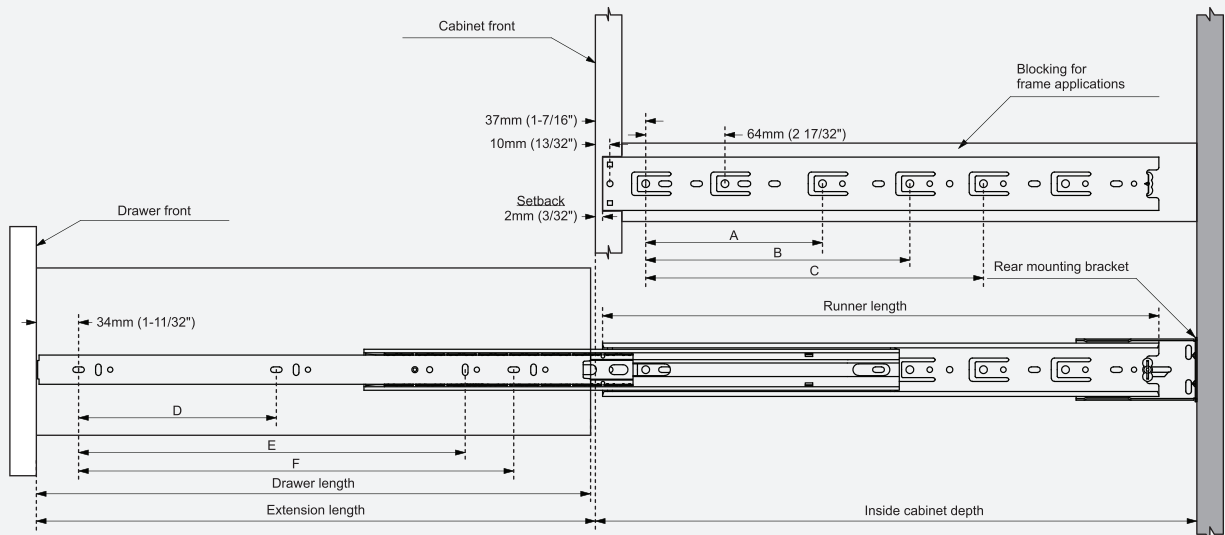

Runner SKU number	Runner length	Extension length ±3mm	Screw locations for frameless cabinet						Inside cabinet depth	
			A	B	C	D	E	F	Mini.	Max. for face-frame
TCH-22101 200 ZP	(8") 200mm	202mm	—	—	—	—	144mm	—	210mm	250mm
TCH-22101 250 ZP	(10") 250mm	253mm	148mm	—	—	176mm	—	—	260mm	300mm
TCH-22101 300 ZP	(12") 300mm	304mm	224mm	—	—	96mm	—	224mm	310mm	350mm
TCH-22101 350 ZP	(14") 350mm	355mm	—	—	224mm	128mm	—	256mm	360mm	400mm
TCH-22101 400 ZP	(16") 400mm	405mm	224mm	—	288mm	160mm	—	320mm	410mm	450mm
TCH-22101 450 ZP	(18") 450mm	456mm	224mm	352mm	—	160mm	—	352mm	460mm	500mm
TCH-22101 500 ZP	(20") 500mm	507mm	224mm	352mm	416mm	192mm	—	416mm	510mm	550mm
TCH-22101 550 ZP	(22") 550mm	558mm	224mm	352mm	416mm	224mm	—	448mm	560mm	600mm
TCH-22101 600 ZP	(24") 600mm	609mm	224mm	352mm	480mm	256mm	—	512mm	610mm	650mm



FULL EXTENSION BALL BEARING SLIDES

TCH-22102 SERIES



Description

- Full extension
- Side mount type
- 45 kg (100 Lbs.) load capacity
- 45mm (1-3/4") Height
- 12.7mm (1/2") Side clearance
- Lever disconnect
- Finish zinc plated
- Smooth telescopic action on precision ball bearings
- Available in lengths ranging from 200mm (8") to 900mm (36")

Mounting brackets




TCH-22000 R.S.45 HL

Slide set



Runner pattern specifications

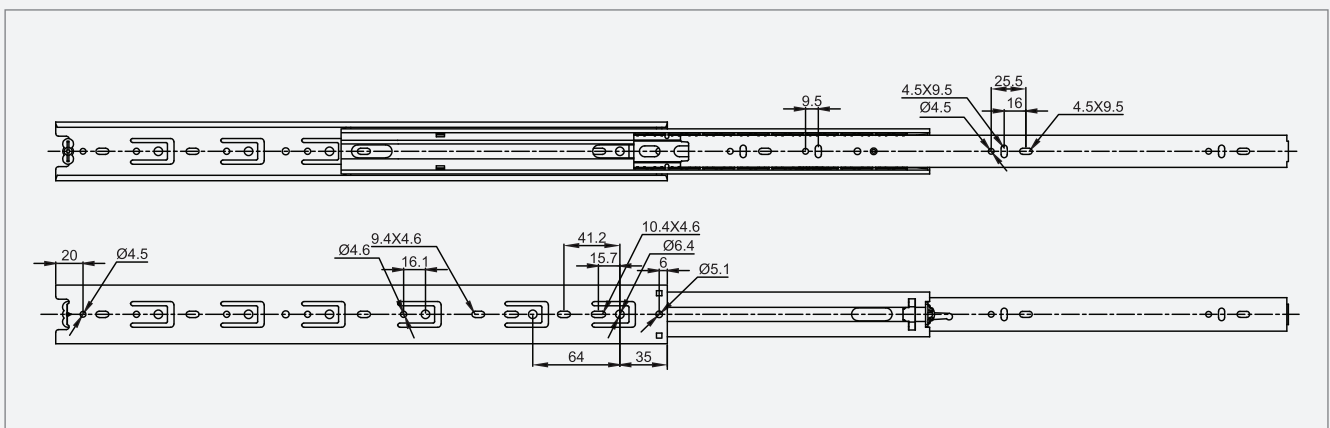


Drawer and Cabinet Specifications




Drawer box specifications

TCH-22000 R.S.45 HL Rear bracket

Front view

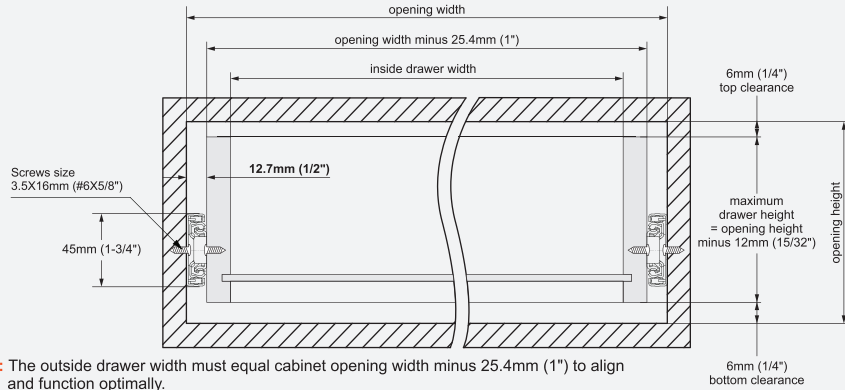


Front view



Runner mounting specifications

Side view

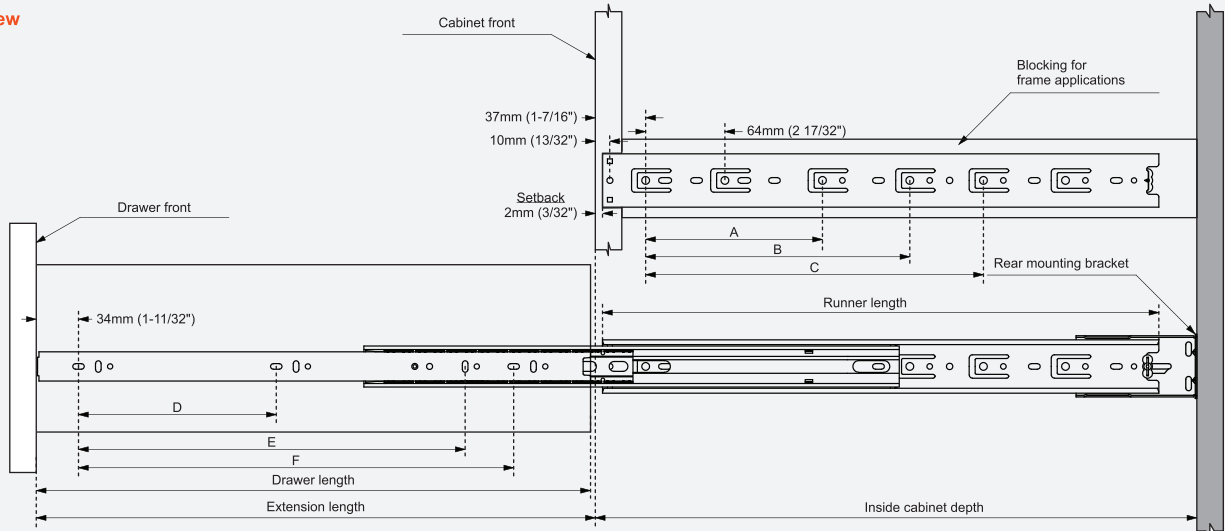

Runner SKU number	Runner length	Extension length ±3mm	Screw locations for frameless cabinet						Inside cabinet depth	
			A	B	C	D	E	F	Mini.	Max. for face-frame
TCH-22102 200 ZP	(8") 200mm	200mm	116mm	—	—	—	142mm	—	210mm	250mm
TCH-22102 250 ZP	(10") 250mm	250mm	148mm	—	—	—	—	—	260mm	300mm
TCH-22102 300 ZP	(12") 300mm	300mm	224mm	—	—	96mm	—	224mm	310mm	350mm
TCH-22102 350 ZP	(14") 350mm	350mm	—	—	224mm	128mm	—	256mm	360mm	400mm
TCH-22102 400 ZP	(16") 400mm	400mm	224mm	—	288mm	160mm	—	320mm	410mm	450mm
TCH-22102 450 ZP	(18") 450mm	450mm	224mm	352mm	—	160mm	—	352mm	460mm	500mm
TCH-22102 500 ZP	(20") 500mm	500mm	224mm	352mm	416mm	192mm	—	416mm	510mm	550mm
TCH-22102 550 ZP	(22") 550mm	550mm	224mm	352mm	416mm	224mm	—	448mm	560mm	600mm
TCH-22102 600 ZP	(24") 600mm	600mm	224mm	352mm	480mm	256mm	—	512mm	610mm	650mm
TCH-22102 650 ZP	(26") 650mm	650mm	224mm	352mm	544mm	288mm	—	576mm	660mm	700mm
TCH-22102 700 ZP	(28") 700mm	700mm	224mm	352mm	544mm	288mm	—	576mm	710mm	750mm
TCH-22102 750 ZP	(30") 750mm	750mm	224mm	352mm	512mm	288mm	—	608mm	760mm	800mm
TCH-22102 800 ZP	(32") 800mm	800mm	224mm	352mm	512mm	320mm	—	672mm	810mm	850mm
TCH-22102 850 ZP	(34") 850mm	850mm	224mm	352mm	608mm	352mm	—	736mm	860mm	900mm
TCH-22102 900 ZP	(36") 900mm	900mm	224mm	352mm	608mm	352mm	—	736mm	910mm	950mm



SOFT CLOSE SIDE MOUNT SLIDES

The Soft Close Ball Bearing Side Mount Drawer Slides combine smooth operation with gentle, controlled closure, offering convenience and reliability for standard-duty storage needs. With a loading capacity of 100 lbs (45 kg), these drawer slides are suitable for various residential and commercial applications. Crafted with precision and durability in mind, they ensure optimal support and functionality while enhancing user experience.



APPLICATIONS

Industrial workbenches and tool cabinets


Commercial kitchen equipment

Heavy-duty storage cabinets

Machinery and equipment enclosures

Utility and service vehicle storage compartments



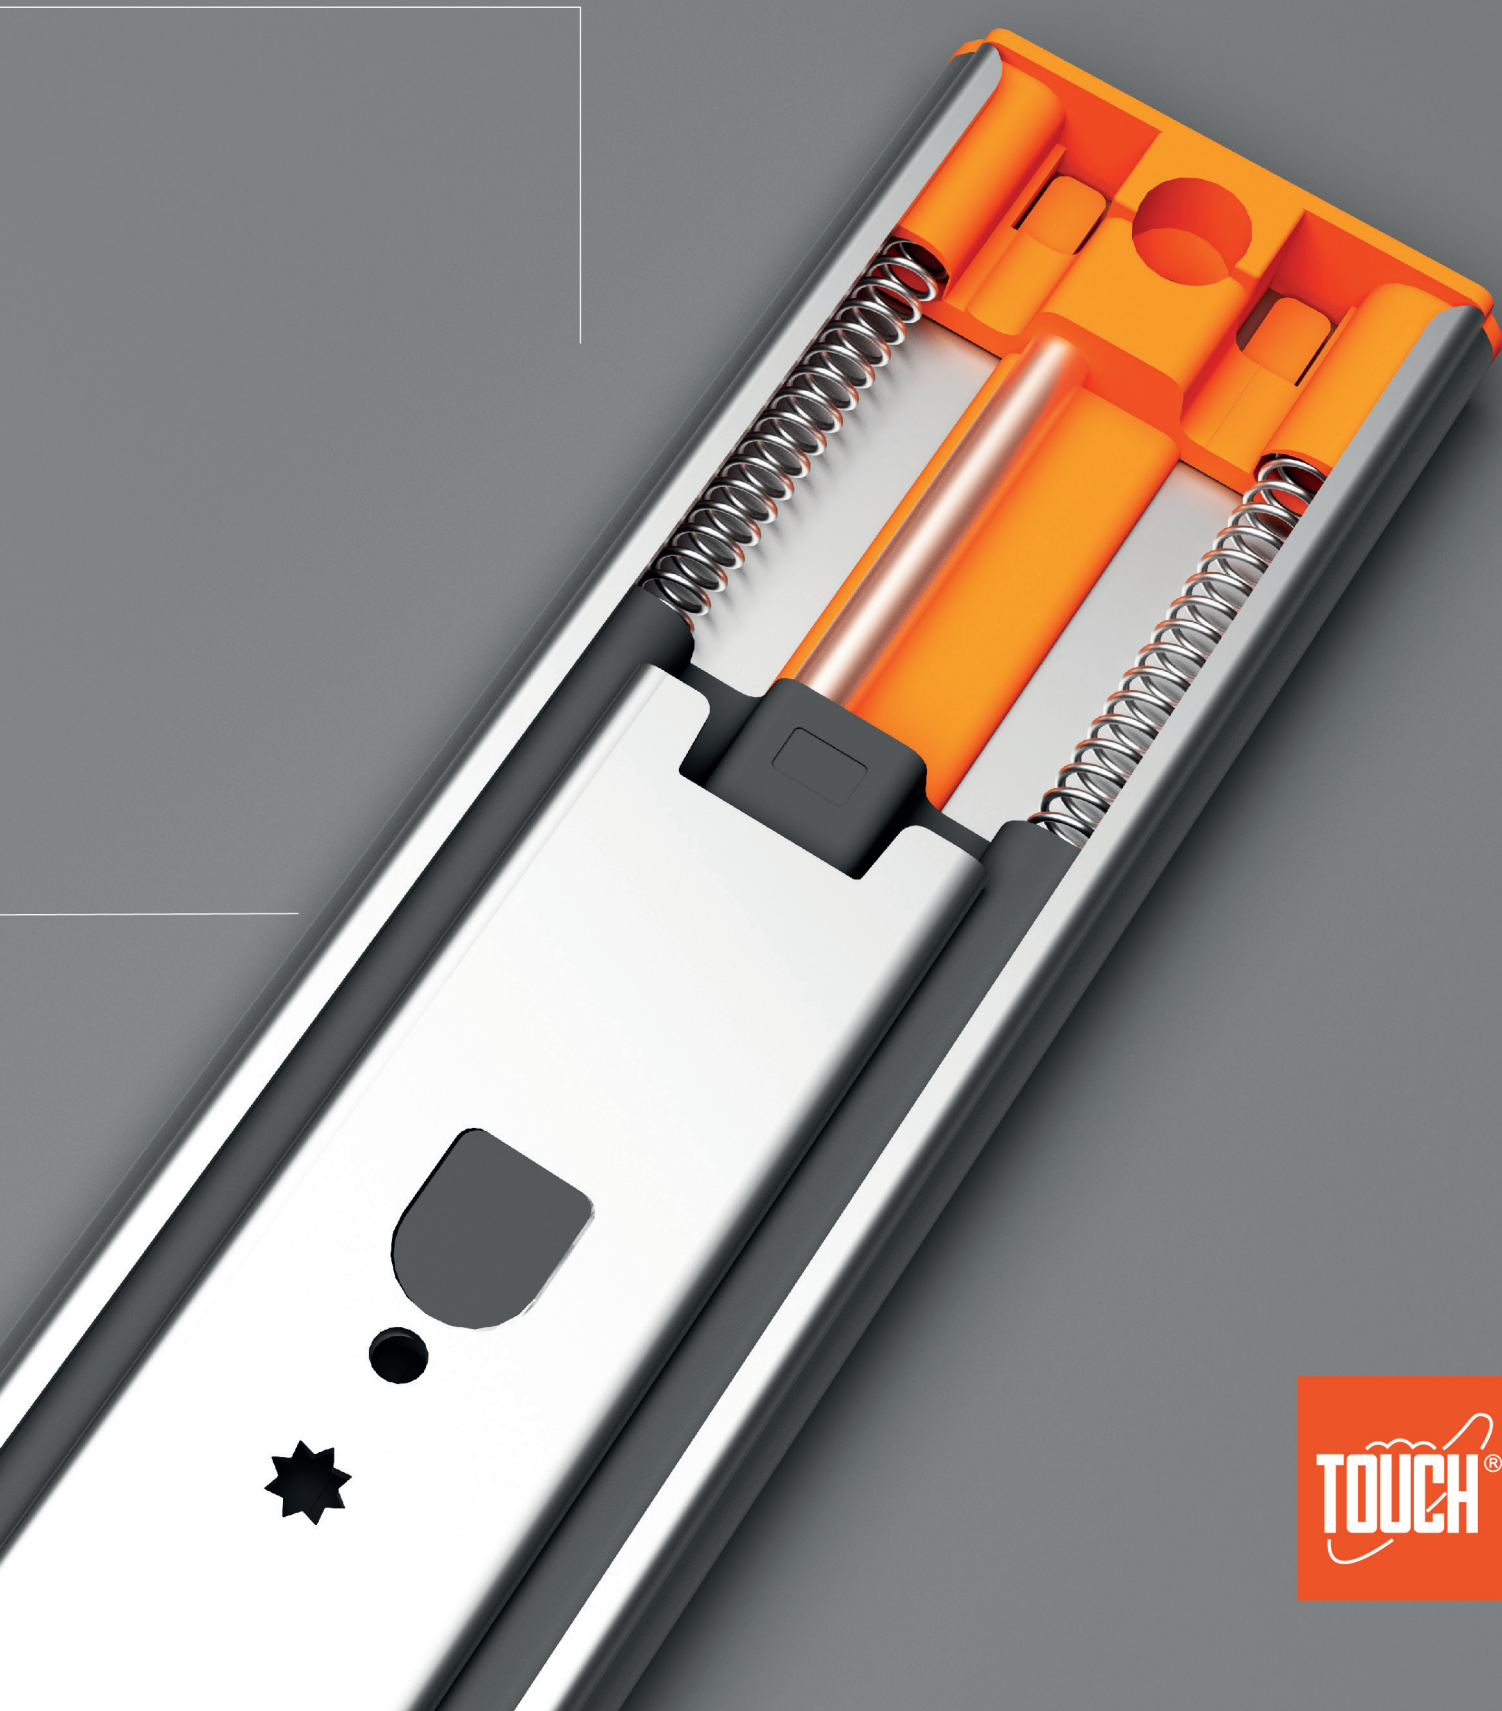



Description

- Full extension
- Side mount type
- 45 kg (100 Lbs.) load capacity
- 45mm (1-3/4") Height
- 12.7mm (1/2") Side clearance
- Lever disconnect
- Finish zinc plated
- Smooth telescopic action on precision ball bearings
- Available in lengths ranging from 250mm (10") to 600mm (24")

Mounting brackets




TCH-22000 R.S.45 HL

Slide set



Runner pattern specifications

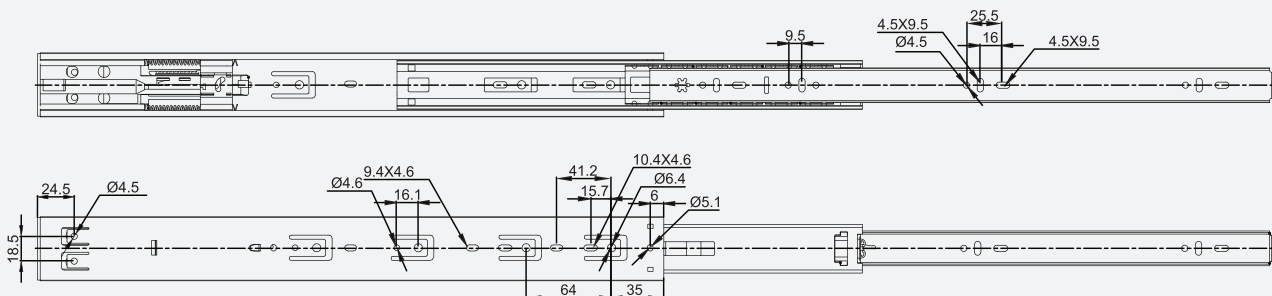


Drawer and Cabinet Specifications




Drawer box specifications

TCH-22000 R.S.45 HL Rear bracket

Front view

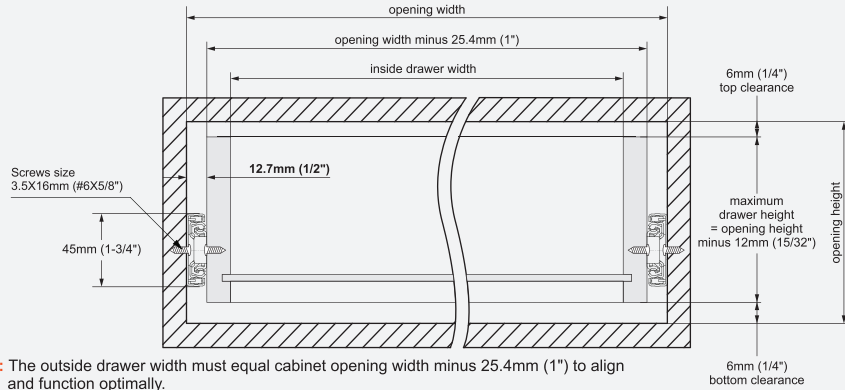


Front view



Runner mounting specifications

Side view

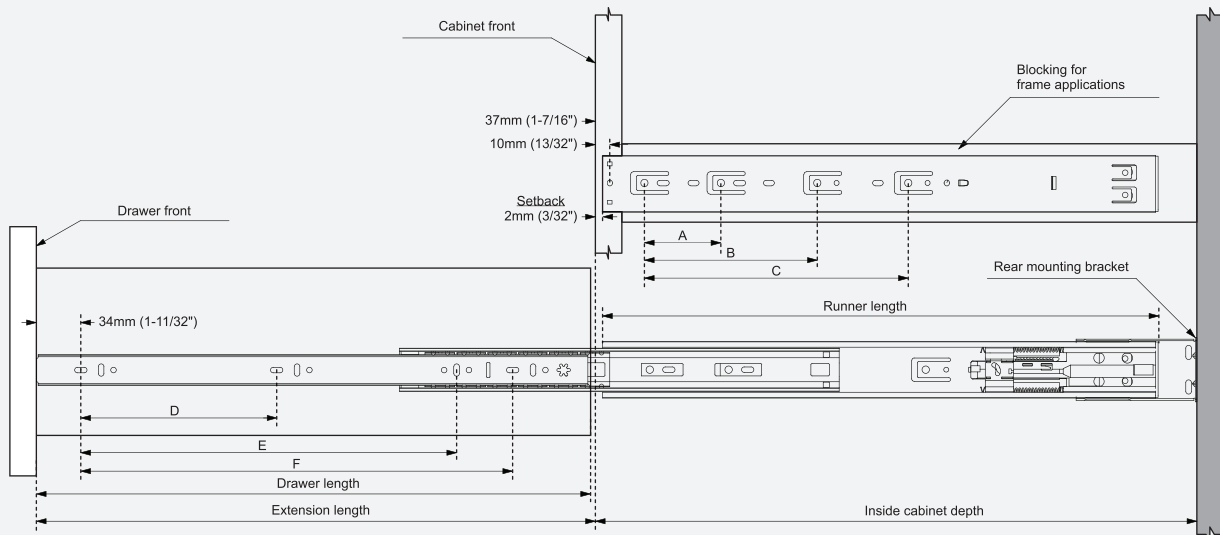

Runner SKU number	Runner length	Extension length	Screw locations for frameless cabinet						Inside cabinet depth	
			A	B	C	D	E	F	Mini.	Max. for face-frame
TCH-22202 250 ZP	(10") 250mm	238mm	64mm	—	—	—	—	—	260mm	300mm
TCH-22202 300 ZP	(12") 300mm	261mm	64mm	—	—	64mm	—	—	310mm	350mm
TCH-22202 350 ZP	(14") 350mm	345mm	64mm	—	—	96mm	—	—	360mm	400mm
TCH-22202 400 ZP	(16") 400mm	395mm	64mm	192mm	—	160mm	—	—	410mm	450mm
TCH-22202 450 ZP	(18") 450mm	445mm	64mm	224mm	—	160mm	—	—	460mm	500mm
TCH-22202 500 ZP	(20") 500mm	500mm	64mm	224mm	—	192mm	—	—	510mm	550mm
TCH-22202 550 ZP	(22") 550mm	550mm	64mm	224mm	320mm	224mm	368mm	—	560mm	600mm
TCH-22202 600 ZP	(24") 600mm	600mm	64mm	224mm	352mm	256mm	—	416mm	610mm	650mm



SOFT CLOSE BALL BEARING SLIDES

TCH-22204 SERIES



Description

- Full extension
- Side mount type
- 45 kg (100 Lbs.) load capacity
- 45mm (1-3/4") Height
- 12.7mm (1/2") Side clearance
- Lever disconnect
- Finish zinc plated
- Smooth telescopic action on precision ball bearings
- Available in lengths ranging from 200mm (8") to 700mm (28")

Mounting brackets




TCH-22000 R.S.45 LX

Slide set



Runner pattern specifications

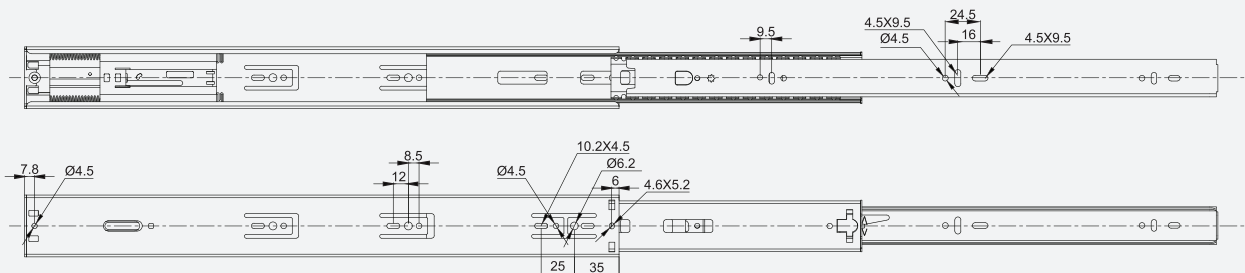


Drawer and Cabinet Specifications




Drawer box specifications

Front view

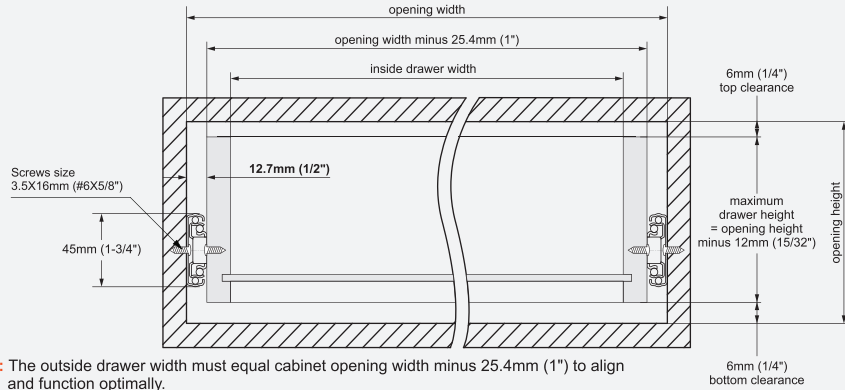


TCH-22000 R.S.45 LX Rear bracket

Front view



Runner mounting specifications

Side view

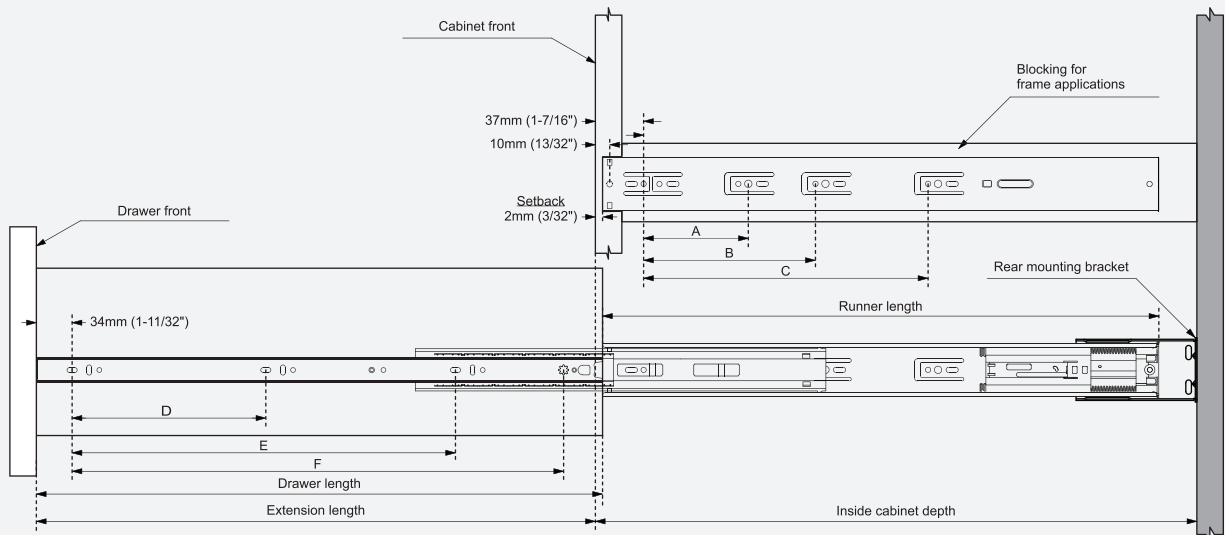

Runner SKU number	Runner length	Extension length ±3mm	Screw locations for frameless cabinet						Inside cabinet depth	
			A	B	C	D	E	F	Mini.	Max. for face-frame
TCH-22204 200 ZP	(8") 200mm	157mm	—	—	—	—	—	148mm	210mm	250mm
TCH-22204 250 ZP	(10") 250mm	177mm	—	—	—	—	—	146mm	260mm	300mm
TCH-22204 300 ZP	(12") 300mm	278mm	96mm	—	—	64mm	—	196mm	310mm	350mm
TCH-22204 350 ZP	(14") 350mm	346mm	73mm	128mm	—	96mm	—	246mm	360mm	400mm
TCH-22204 400 ZP	(16") 400mm	496mm	128mm	184mm	—	128mm	—	296mm	410mm	450mm
TCH-22204 450 ZP	(18") 450mm	446mm	128mm	224mm	—	160mm	285mm	346mm	460mm	500mm
TCH-22204 500 ZP	(20") 500mm	496mm	128mm	224mm	416mm	192mm	320mm	396mm	510mm	550mm
TCH-22204 550 ZP	(22") 550mm	546mm	128mm	224mm	448mm	192mm	384mm	446mm	560mm	600mm
TCH-22204 600 ZP	(24") 600mm	596mm	128mm	224mm	480mm	224mm	416mm	496mm	610mm	650mm
TCH-22204 650 ZP	(26") 650mm	646mm	128mm	224mm	480mm	256mm	480mm	546mm	660mm	700mm
TCH-22204 700 ZP	(28") 700mm	696mm	128mm	224mm	480mm	288mm	512mm	596mm	710mm	750mm





PUSH TO OPEN BALL BEARING SLIDES

The Push-Open Ball Bearing Side Mount Drawer Slides offer convenience and ease of use with a standard-duty loading capacity of 100 lbs (45 kg), making them suitable for various residential and commercial applications. Crafted with precision engineering and durable materials, these drawer slides ensure smooth operation and reliable performance while eliminating the need for traditional drawer pulls or handles.



APPLICATIONS

Kitchen cabinets and drawers

Bathroom Vanities

Office furniture and filing cabinets

Retail displays and shelving units




Drawer and Cabinet Specifications



Drawer box specifications


TCH-22000 R.S.45 LX Rear bracket

Front view

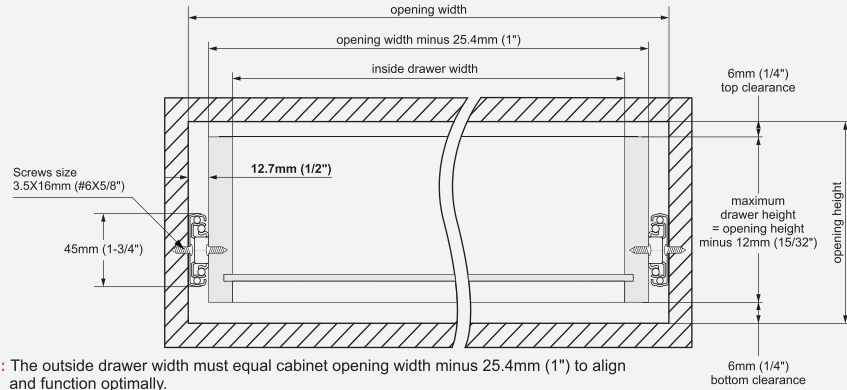


Note: The outside drawer width must equal cabinet opening width minus 25.4mm (1") to align and function optimally.

Front view




Runner mounting specifications

Side view

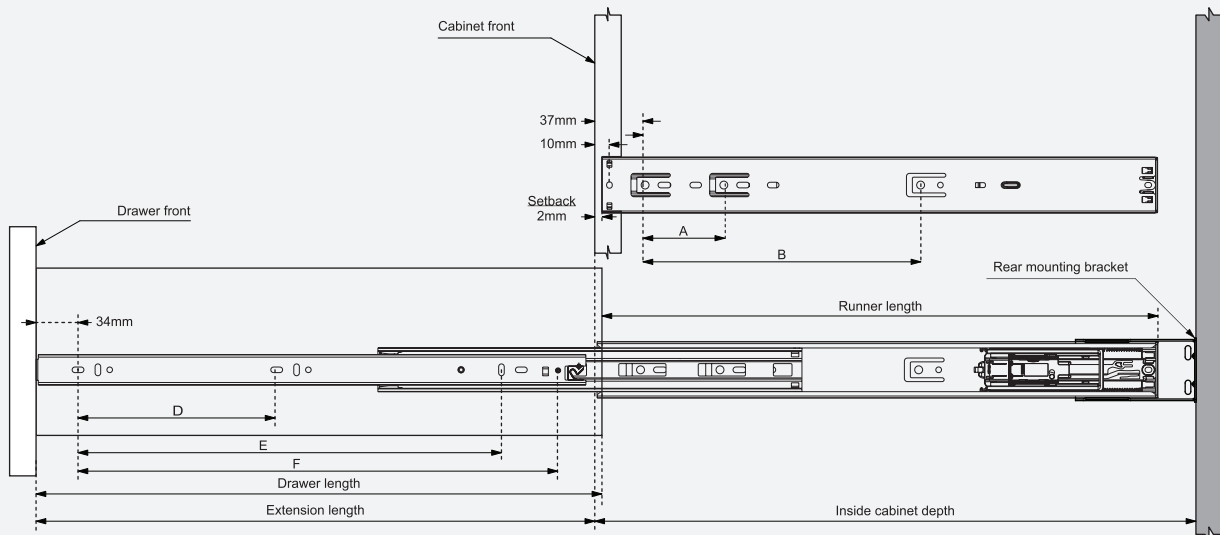

Runner SKU number	Runner length	Extension length ±3mm	Screw locations for frameless cabinet						Inside cabinet depth	
			A	B	C	D	E	F	Mini.	Max. for face-frame
TCH-22300 200 ZP										
TCH-22300 250 ZP										
TCH-22300 300 ZP										
TCH-22300 350 ZP										
TCH-22300 400 ZP										
TCH-22300 450 ZP										
TCH-22300 500 ZP										
TCH-22300 550 ZP										
TCH-22300 600 ZP										
TCH-22300 650 ZP										
TCH-22300 700 ZP										

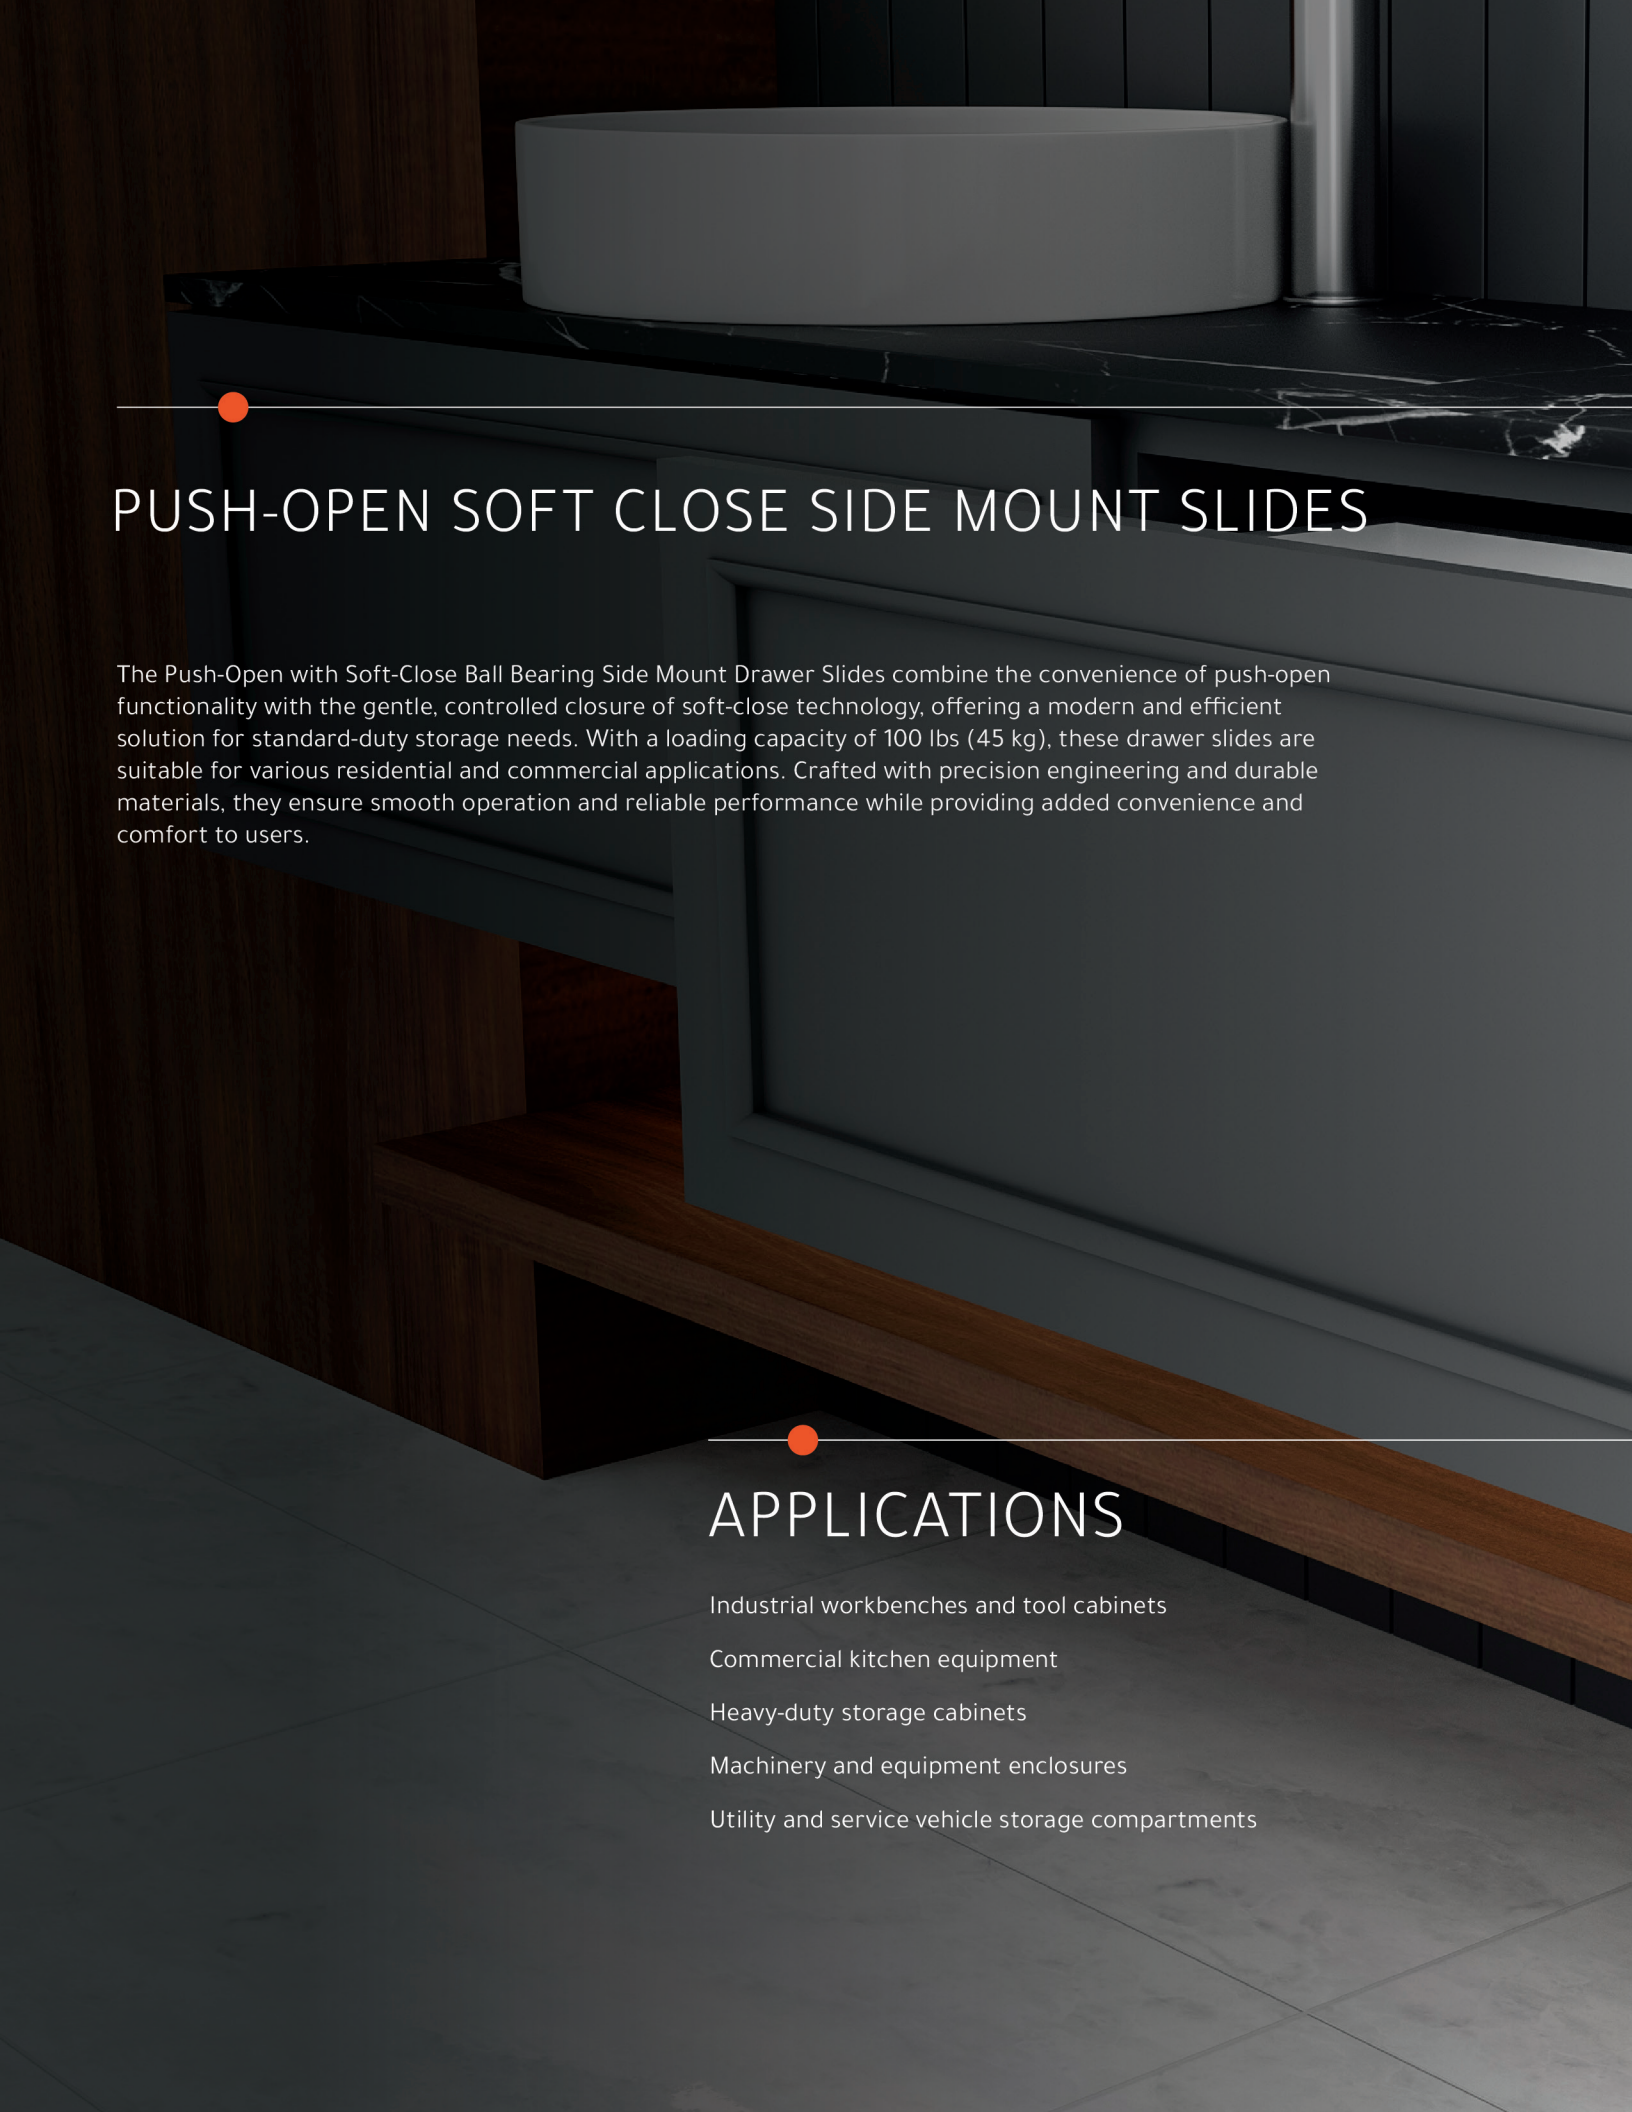

PUSH-OPEN SOFT CLOSE SIDE MOUNT SLIDES

The Push-Open with Soft-Close Ball Bearing Side Mount Drawer Slides combine the convenience of push-open functionality with the gentle, controlled closure of soft-close technology, offering a modern and efficient solution for standard-duty storage needs. With a loading capacity of 100 lbs (45 kg), these drawer slides are suitable for various residential and commercial applications. Crafted with precision engineering and durable materials, they ensure smooth operation and reliable performance while providing added convenience and comfort to users.



APPLICATIONS

Industrial workbenches and tool cabinets

Commercial kitchen equipment

Heavy-duty storage cabinets

Machinery and equipment enclosures

Utility and service vehicle storage compartments





Description

Mounting brackets




TCH-22000 R.S.45 HL

Slide set



Runner pattern specifications

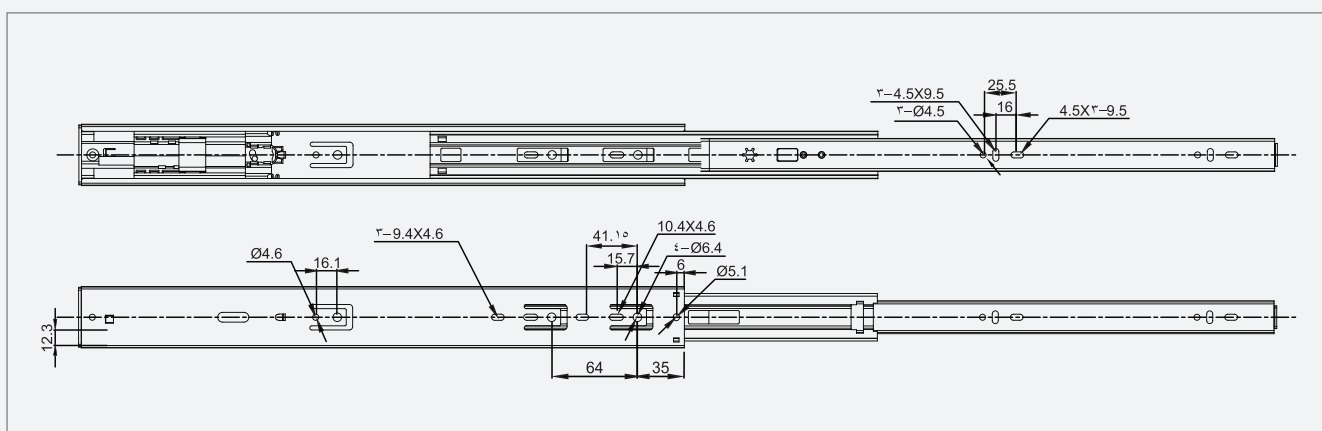


Drawer and Cabinet Specifications




Drawer box specifications

TCH-22000 R.S.45 HL Rear bracket

Front view

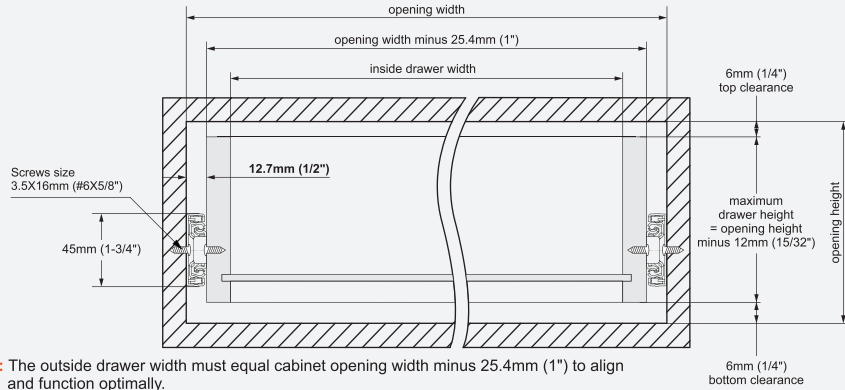


Front view



Runner mounting specifications

Side view

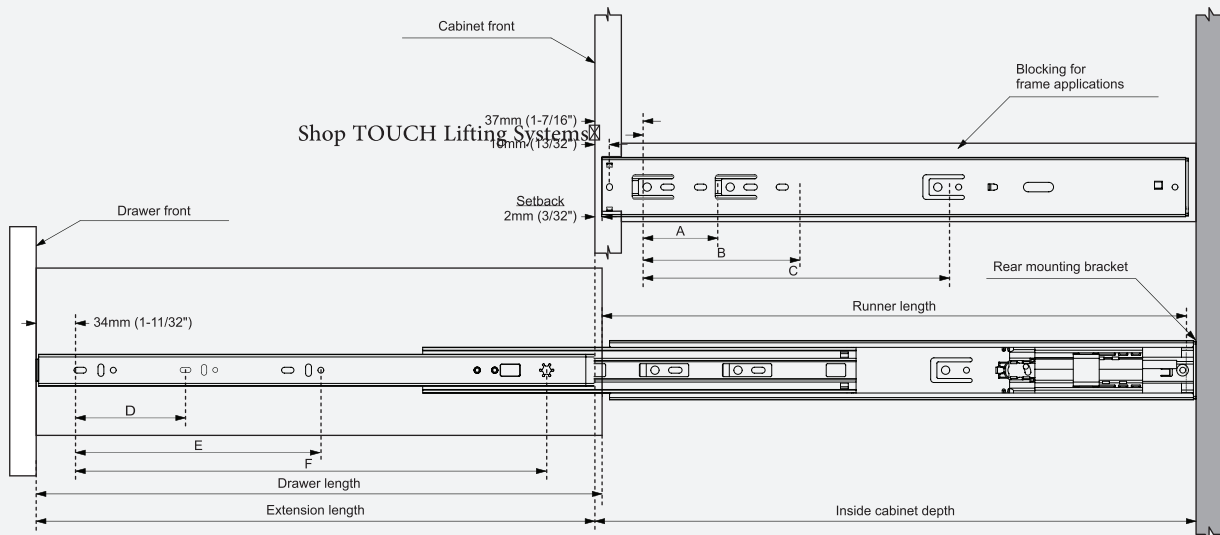

Runner SKU number	Runner length	Extension length	Screw locations for frameless cabinet						Inside cabinet depth	
			A	B	C	D	E	F	Mini.	Max. for face-frame
TCH-22400 300 ZP										
TCH-22400 350 ZP										
TCH-22400 400 ZP										
TCH-22400 450 ZP										
TCH-22400 500 ZP										
TCH-22400 550 ZP										
TCH-22400 600 ZP										



PUSH-OPEN SOFT CLOSE BALL BEARING SLIDES

TCH-22404 SERIES



Description

- Full extension
- Side mount type
- 45 kg (100 Lbs.) load capacity
- 45mm (1-3/4") Height
- 12.7mm (1/2") Side clearance
- Lever disconnect
- Finish zinc plated
- Smooth telescopic action on precision ball bearings
- Available in lengths ranging from 300mm (12") to 700mm (28")

Mounting brackets




TCH-22000 R.S.45 LX

Slide set



Runner pattern specifications

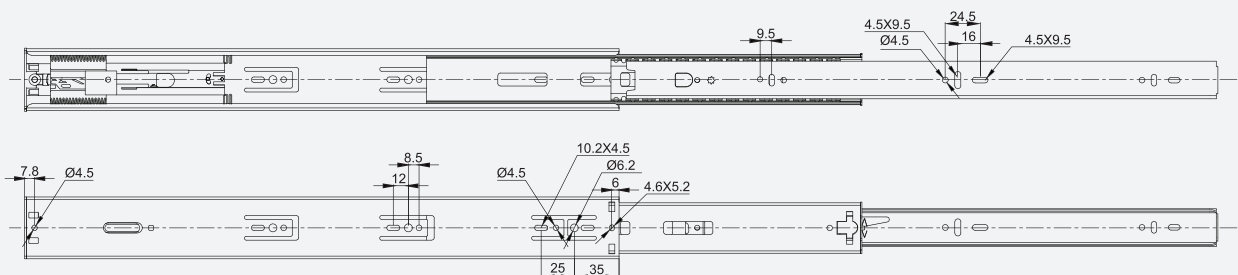


Drawer and Cabinet Specifications




Drawer box specifications

TCH-22000 R.S.45 LX Rear bracket

Front view

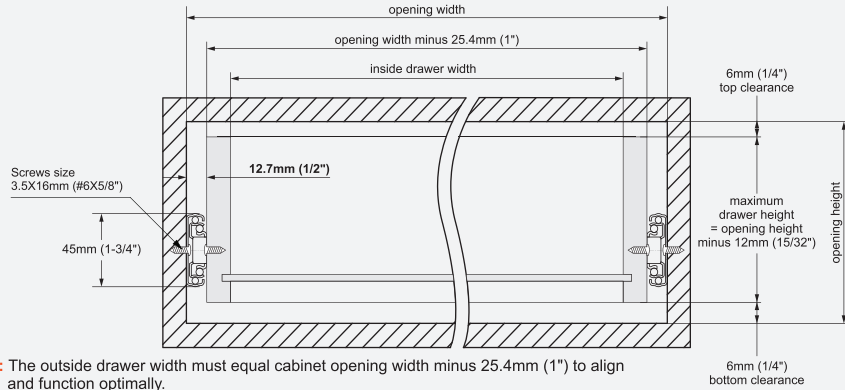


Front view




Runner mounting specifications

Side view

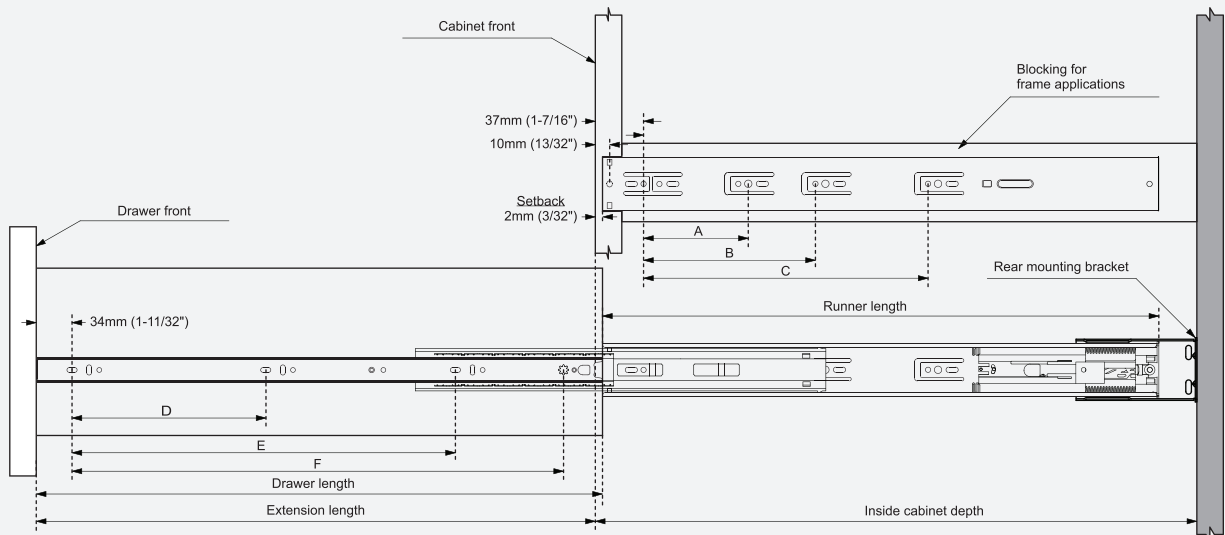

Runner SKU number	Runner length	Extension length ±3mm	Screw locations for frameless cabinet						Inside cabinet depth	
			A	B	C	D	E	F	Mini.	Max. for face-frame
TCH-22404 300 ZP	(12") 300mm	248mm	96mm	—	—	64mm	—	189mm	310mm	350mm
TCH-22404 350 ZP	(14") 350mm	315mm	73mm	128mm	—	96mm	—	239mm	360mm	400mm
TCH-22404 400 ZP	(16") 400mm	380mm	128mm	184mm	—	128mm	—	262mm	410mm	450mm
TCH-22404 450 ZP	(18") 450mm	446mm	128mm	224mm	—	160mm	285mm	312mm	460mm	500mm
TCH-22404 500 ZP	(20") 500mm	496mm	128mm	224mm	416mm	192mm	320mm	362mm	510mm	550mm
TCH-22404 550 ZP	(22") 550mm	546mm	128mm	224mm	448mm	192mm	384mm	412mm	560mm	600mm
TCH-22404 600 ZP	(24") 600mm	596mm	128mm	224mm	480mm	224mm	416mm	462mm	610mm	650mm
TCH-22404 650 ZP	(26") 650mm	646mm	128mm	224mm	480mm	256mm	480mm	512mm	660mm	700mm
TCH-22404 700 ZP	(28") 700mm	696mm	128mm	224mm	480mm	288mm	512mm	562mm	710mm	750mm





HEAVY DUTY SIDE MOUNT SLIDES

The Side Mount Drawer Slides, boasting a heavy-duty loading capacity of 150 lbs (68 kg) to 220 lbs (100 kg), are robust and reliable hardware components designed to support substantial loads with ease. Crafted from durable materials and engineered with precision, these drawer slides offer exceptional strength, stability, and smooth operation, making them ideal for demanding residential and commercial applications.



APPLICATIONS

- Industrial workbenches and tool cabinets
- Commercial kitchen equipment
- Heavy-duty storage cabinets
- Machinery and equipment enclosures
- Utility and service vehicle storage compartments





FULL EXTENSION HEAVY DUTY BALL BEARING SLIDES



TCH-22103 SERIES




Description

- Full extension
- Side mount type
- 100 kg (220 Lbs.) load capacity
- 53mm (2-1/16") Height
- 19mm (3/4") Side clearance
- Non-disconnect
- Finish zinc plated
- Smooth telescopic action on precision ball bearings
- Available in lengths ranging from 300mm (12") to 1000mm (40")

Slide set

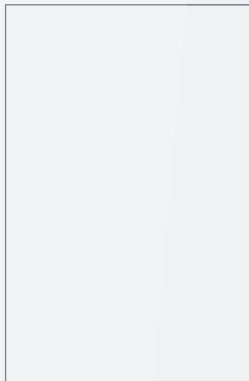

Runner pattern specifications

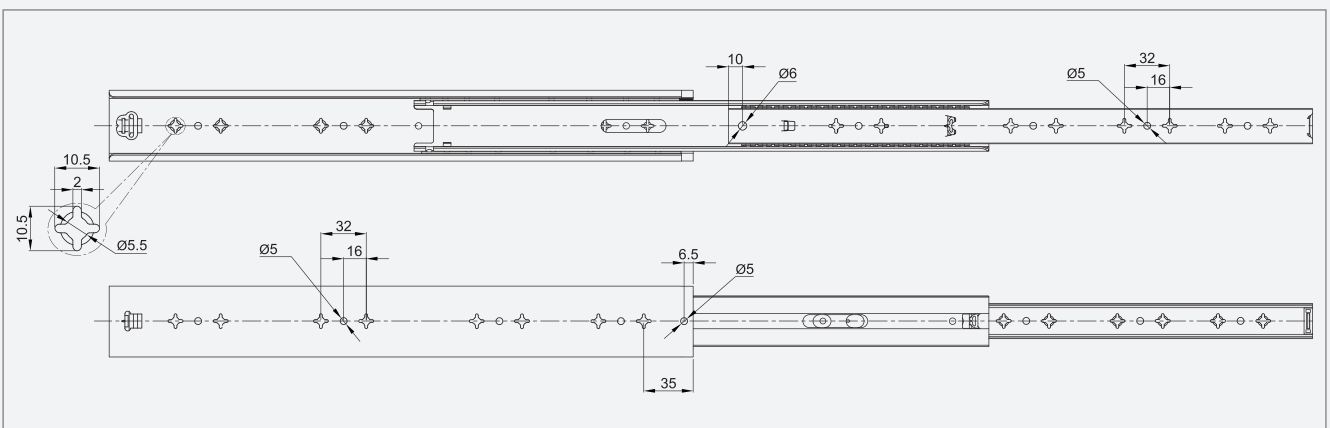


Drawer and Cabinet Specifications



Drawer box specifications


Front view

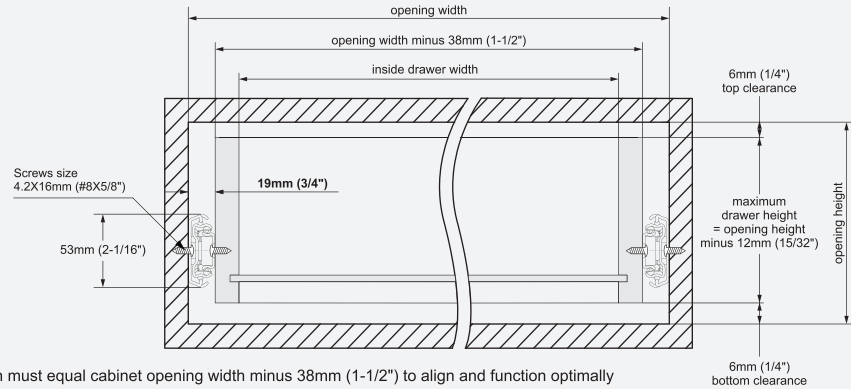

Note: The outside drawer width must equal cabinet opening width minus 38mm (1-1/2") to align and function optimally

Runner mounting specifications

Side view

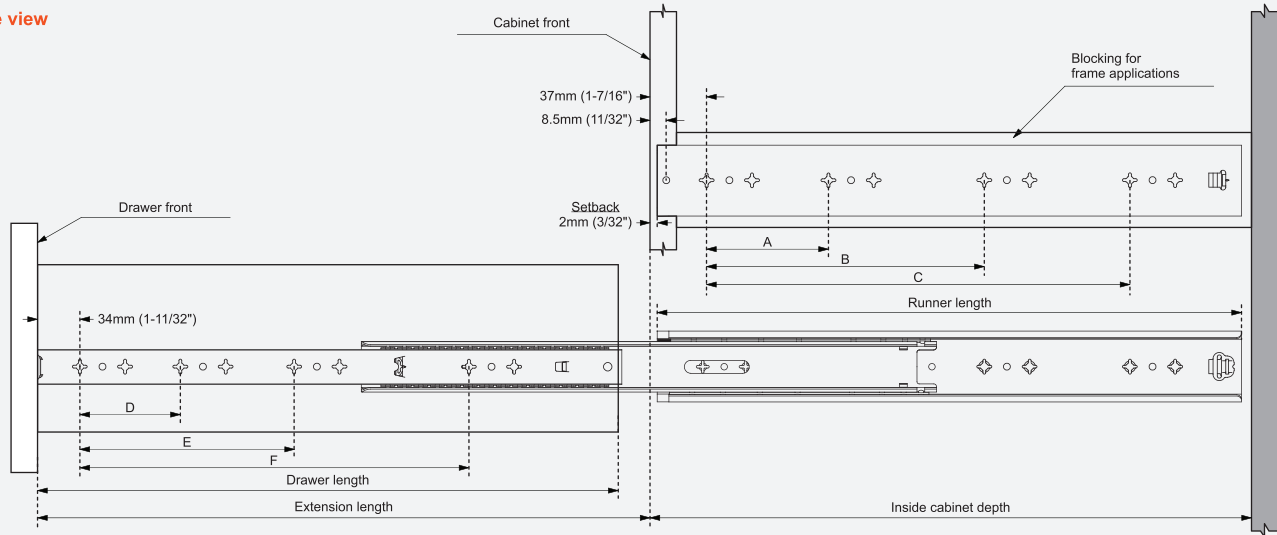

Runner SKU number	Runner length	Extension length ±3mm	Screw locations for frameless cabinet						Mini. inside cabinet depth
			A	B	C	D	E	F	
TCH-22103 300 ZP	(12") 300mm	325mm	160mm	—	—	160mm	—	—	310mm
TCH-22103 350 ZP	(14") 350mm	375mm	224mm	—	—	224mm	—	—	360mm
TCH-22103 400 ZP	(16") 400mm	425mm	128mm	256mm	—	128mm	256mm	—	410mm
TCH-22103 450 ZP	(18") 450mm	475mm	160mm	320mm	—	160mm	320mm	—	460mm
TCH-22103 500 ZP	(20") 500mm	525mm	192mm	352mm	—	192mm	352mm	—	510mm
TCH-22103 550 ZP	(22") 550mm	575mm	192mm	416mm	—	192mm	416mm	—	560mm
TCH-22103 600 ZP	(24") 600mm	625mm	256mm	480mm	—	256mm	480mm	—	610mm
TCH-22103 650 ZP	(26") 650mm	675mm	256mm	512mm	—	256mm	512mm	—	660mm
TCH-22103 700 ZP	(28") 700mm	725mm	288mm	576mm	—	288mm	576mm	—	710mm
TCH-22103 750 ZP	(30") 750mm	775mm	224mm	448mm	608mm	224mm	448mm	608mm	760mm
TCH-22103 800 ZP	(32") 800mm	825mm	224mm	448mm	672mm	224mm	448mm	672mm	810mm
TCH-22103 850 ZP	(34") 850mm	875mm	256mm	512mm	704mm	256mm	512mm	704mm	860mm
TCH-22103 900 ZP	(36") 900mm	925mm	256mm	512mm	768mm	256mm	512mm	768mm	910mm
TCH-22103 950 ZP	(38") 950mm	975mm	256mm	576mm	832mm	256mm	576mm	832mm	960mm
TCH-22103 1000 ZP	(40") 1000mm	1025mm	256mm	576mm	864mm	256mm	576mm	864mm	1010mm




Description

- Full extension
- Side mount type
- 68 kg (150 Lbs.) load capacity
- 53mm (2-1/16") Height
- 19mm (3/4") Side clearance
- Lever disconnect
- Finish zinc plated
- Smooth telescopic action on precision ball bearings
- Available in lengths ranging from 300mm (12") to 1000mm (40")

Slide set



Runner pattern specifications

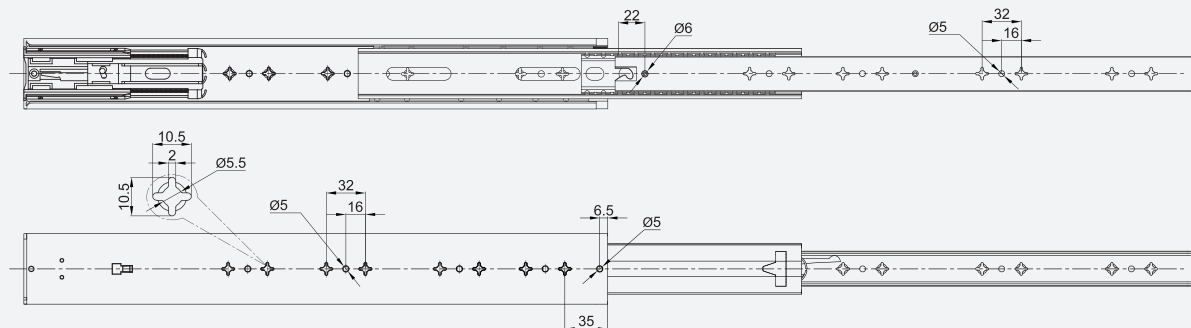


Drawer and Cabinet Specifications



Drawer box specifications


Front view

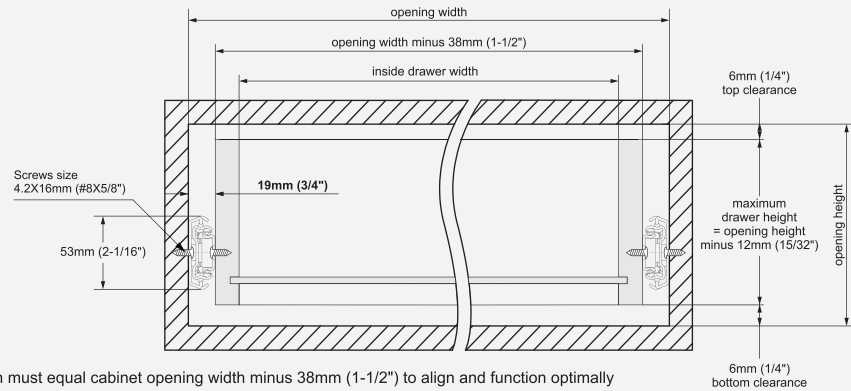

Note: The outside drawer width must equal cabinet opening width minus 38mm (1-1/2") to align and function optimally

Runner mounting specifications

Side view

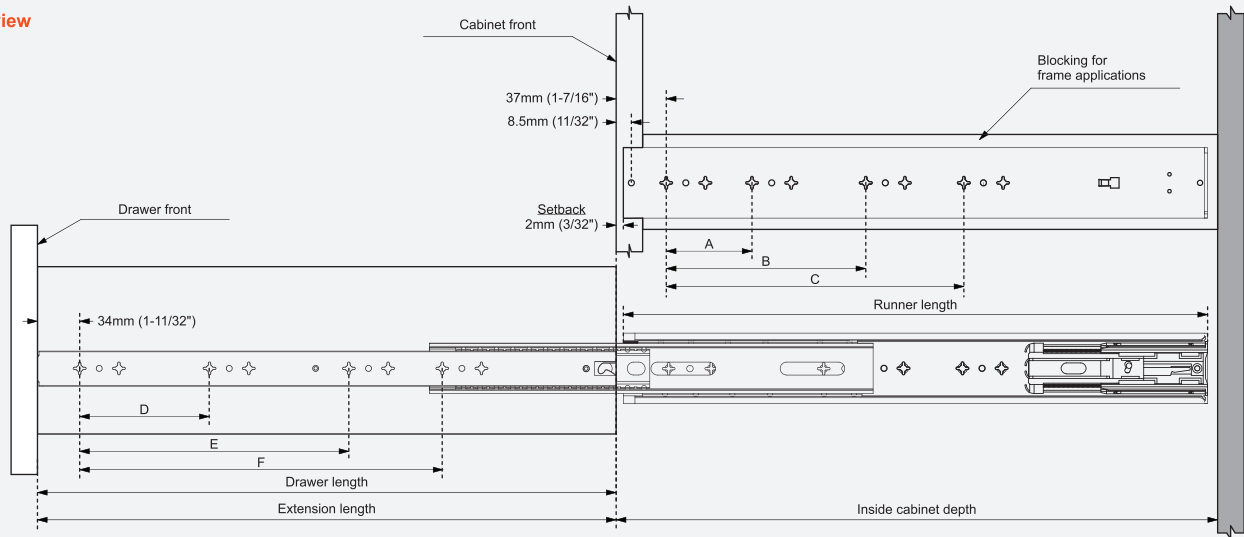

Runner SKU number	Runner length	Extension length ±3mm	Screw locations for frameless cabinet						Mini. inside cabinet depth
			A	B	C	D	E	F	
TCH-22203 300 ZP	(12") 300mm	300mm	96mm	—	—	64mm	192mm	—	310mm
TCH-22203 350 ZP	(14") 350mm	350mm	128mm	—	—	128mm	—	—	360mm
TCH-22203 400 ZP	(16") 400mm	400mm	128mm	224mm	—	160mm	288mm	—	410mm
TCH-22203 450 ZP	(18") 450mm	450mm	128mm	256mm	—	160mm	—	—	460mm
TCH-22203 500 ZP	(20") 500mm	500mm	128mm	288mm	—	160mm	384mm	—	510mm
TCH-22203 550 ZP	(22") 550mm	550mm	160mm	352mm	—	192mm	416mm	—	560mm
TCH-22203 600 ZP	(24") 600mm	600mm	160mm	384mm	—	224mm	480mm	—	610mm
TCH-22203 650 ZP	(26") 650mm	650mm	192mm	448mm	—	256mm	512mm	—	660mm
TCH-22203 700 ZP	(28") 700mm	700mm	224mm	480mm	—	288mm	576mm	—	710mm
TCH-22203 750 ZP	(30") 750mm	750mm	160mm	352mm	544mm	224mm	480mm	640mm	760mm
TCH-22203 800 ZP	(32") 800mm	800mm	160mm	352mm	576mm	256mm	512mm	672mm	810mm
TCH-22203 850 ZP	(34") 850mm	850mm	192mm	384mm	640mm	256mm	544mm	736mm	860mm
TCH-22203 900 ZP	(36") 900mm	900mm	192mm	448mm	704mm	256mm	576mm	768mm	910mm
TCH-22203 950 ZP	(38") 950mm	950mm	192mm	448mm	736mm	288mm	608mm	832mm	960mm
TCH-22203 1000 ZP	(40") 1000mm	1000mm	256mm	512mm	800mm	288mm	608mm	864mm	1010mm





TOUCH Cabinets Hardware

www.TouchCabinetsHardware.com