





PUSH-OPEN HEAVY-DUTY LIFT-UP DOOR SYSTEM

TCH-311011 023.T



Features

- Free-stop functionality
- Push-to-open operation
- Adjustable opening angle between 85° - 100°
- Opening and closing force adjustment
- 3d adjustment capability
- No hinges required
- Compact, space-saving design
- Compatible cabinet dimensions
 - Height: (10") 250 mm to (32") 800 mm
 - Front weight: (2.6 lb - 40.0 lb) 1.2 kg - 18.4 kg
- Sold as a set

Color options



Dark Gray



Light Gray



White

Usage Recommendations

SKU	LF-Based Selection		Weight-Based Selection					
	Cabinet Height	LF	Cabinet Height (KH)		Front Weight (LB)		Front Weight (KG)	
			IN	MM	Min.	Max.	Min.	Max.
TCH-311011 023.T.L	10" - 20" 250 mm - 500 mm	52.1 – 130.2 in·lb 600 - 1500 mm·kg	10	250	5.3	13.2	2.4	6.0
			12	300	4.4	11.0	2.0	5.0
			14	350	3.7	9.3	1.7	4.2
			16	400	3.3	8.2	1.5	3.7
			18	450	3.1	7.3	1.4	3.3
			20	500	2.6	6.6	1.2	3.0
TCH-311011 023.T.M	12" - 24" 300 mm - 600 mm	115.4 – 238.7 in·lb 1330 - 2750 mm·kg	12	300	9.9	20.1	4.5	9.1
			14	350	8.4	17.2	3.8	7.8
			16	400	7.3	15.0	3.3	6.8
			18	450	6.6	13.4	3.0	6.1
			20	500	6.0	12.1	2.7	5.5
			22	550	5.3	11.0	2.4	5.0
TCH-311011 023.T.H	14" - 28" 350 mm - 700 mm	191.0 – 477.4 in·lb 2200- 5500 mm·kg	24	600	4.9	9.9	2.2	4.5
			14	350	13.9	34.6	6.3	15.7
			16	400	12.1	30.2	5.5	13.7
			18	450	10.8	26.9	4.9	12.2
			20	500	9.7	24.3	4.4	11.0
			22	550	8.8	22.0	4.0	10.0
TCH-311011 023.T.HD	18" - 32" 450 mm - 800 mm	347.2 – 720.4 in·lb 4000 - 8300 mm·kg	24	600	8.2	20.1	3.7	9.1
			26	650	7.5	18.5	3.4	8.4
			28	700	7.1	17.2	3.2	7.8
			18	450	19.6	40.6	8.9	18.4
			20	500	17.6	36.6	8.0	16.6
			22	550	16.1	33.1	7.3	15.0
			24	600	14.8	30.4	6.7	13.8
			26	650	13.7	28.0	6.2	12.7
			28	700	12.6	26.0	5.7	11.8
			32	800	11.0	22.7	5.0	10.3

Note:

Door weight is calculated using a standard density factor of 0.00000072 (Metric: 720 kg/m³ | Imperial: ≈ 0.026 lb/in³). Values shown are estimates and should be verified against the actual door weight for final product selection.

Key Definitions:

- KH = Cabinet Height.

Lift Force (LF) Formula:

- LF = KH × [Door Weight + (Handle Weight × 2)]


Model Selection Criteria:

- If the LF value falls within an overlapping range, always choose the larger model to ensure optimal performance and longevity.
- If the LF falls outside the standard range, a customized configuration is recommended to meet your cabinet's specific requirements.

General Informations




Cabinet specification

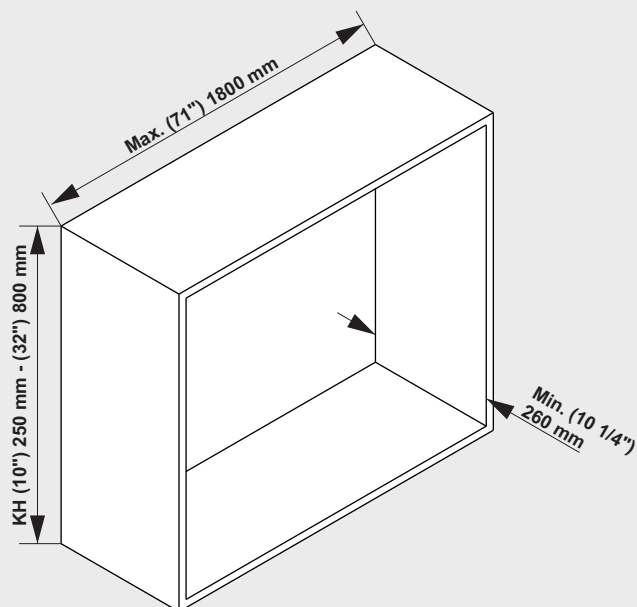


Adjustment & label guide


Lift force adjustment

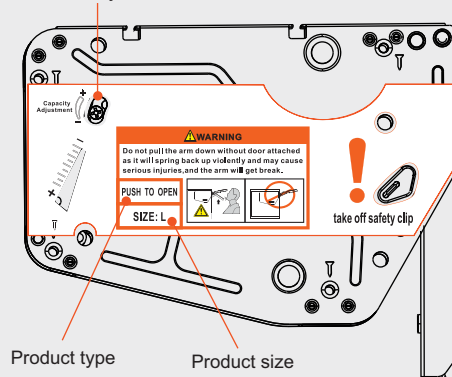


Included components

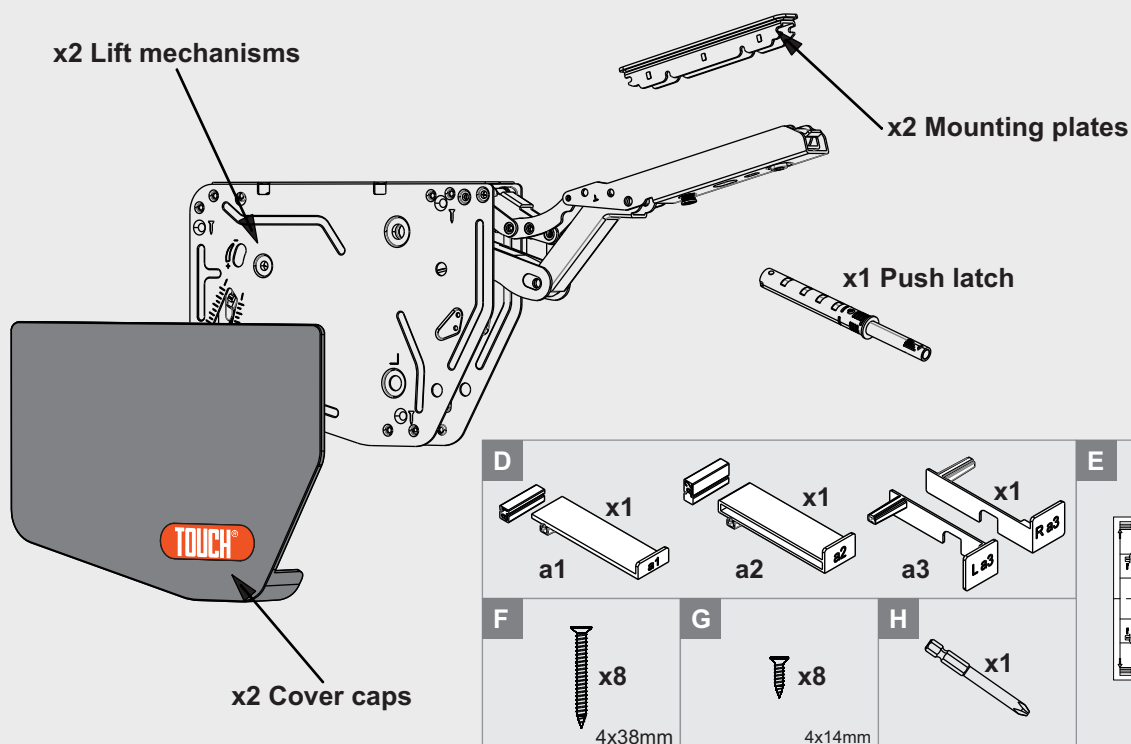

Front panel alignment adjustment

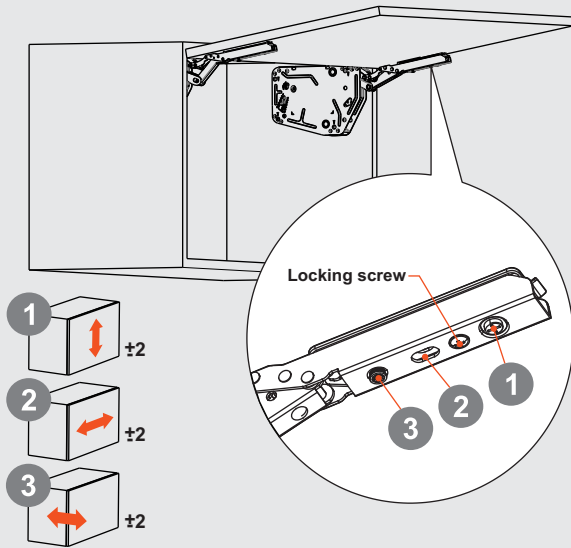

Adjusting door opening range

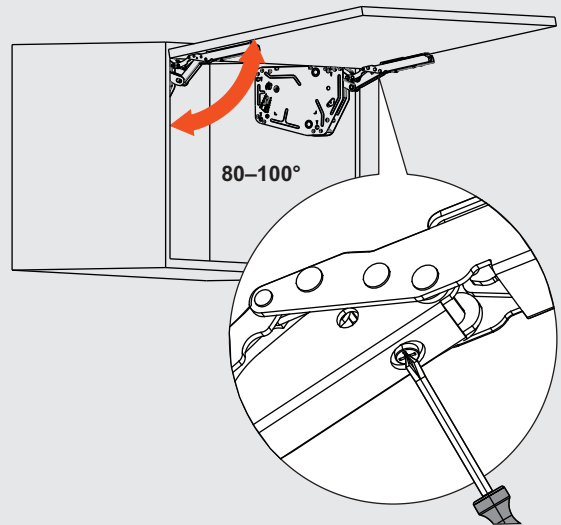

Lift mechanism force adjustment

